Woolmarket Professional Plaza 13061 Shriners Blvd., Suite C Biloxi, Mississippi 39532 Office (228) 392-1638 Fax (228) 392-1679 Cell (228) 860-8161 dennis@dsaeng.net

April 23, 2022

Carrie Barefoot, P.E. Mississippi Office Of Pollution Control Municipal Permit Compliance Section 515 E Amite St. Jackson, MS 39201

Re:

Scarlett Glen (aka Walker Rd) Subdivision

MDEQ AI# 80785 Jackson County

Carrie:

Submitted herewith is one (1) set of drainage construction plans for the above referenced consisting of the Erosion Control Plan, Drainage Plan and Detention Basin Details which includes the Storm Water Pollution Prevention Plan and Lot Maintenance Plan along with the post-construction elevations, grades and construction details. Also enclosed is the "Large Construction Notice of Intent (LCNOI)" for the Storm Water NPDES permit for your review and concurrence. The WQC package has been submitted and the wetlands permit is in the COE review process.

Thank you for your assistance and please let us know if you have any questions or if any additional information is needed.

Yours very truly,

Dennis Stieffel, P.E.

President

Enc.

726-9.wpd



MISSISSIPPI DEPARTMENT OF ENVIRONMENTAL QUALITY (MDEQ) Large Construction Storm Water General Permit NPDES Permit MSR10

LARGE CONSTRUCTION FORMS PACKAGE

•	LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI) FORM	2
•	PRIME CONTRACTOR CERTIFICATION FORM	7
•	REGISTRATION FORM FOR RESIDENTIAL LOT COVERAGE	8
•	SITE INSPECTION AND CERTIFICATION FORM	. 12
•	MAJOR MODIFICATION FORM	. 13
•	REQUEST FOR TRANSFER OF PERMIT, GENERAL PERMIT COVERAGE AND/OR NAME CHANGE	. 14
•	INSPECTION SUSPENSION FORM	. 16
•	REQUEST FOR TERMINATION OF COVERAGE	. 17

These standard forms are used to apply for permit coverage under the Large Construction Storm Water General Permit and for submittals and record keeping required by permit conditions after coverage has been granted. The forms are on our website at www.deq.state.ms.us/MDEQ.nsf/page/epd epdgeneral. Required information can be completed on screen, printed and signed.

Revised: 12/06/16



LARGE CONSTRUCTION NOTICE OF INTENT (LCNOI) FOR COVERAGE UNDER THE LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT

INSTRUCTIONS

The Large Construction Notice of Intent (LCNOI) is for coverage under the Large Construction General Permit for land disturbing activities of five (5) acres or greater; or for land disturbing activities, which are part of a larger common plan of development or sale that are initially less than five (5) acres but will ultimately disturb five (5) or more acres. Applicant must be the owner or operator. For construction activities, the operator is typically the prime contractor. The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the Large Construction Storm Water General Permit MSR10.

If the company seeking coverage is a corporation, a limited liability company, a partnership, or a business trust, attach proof of its registration with the Mississippi Secretary of State and/or its Certificate of Good Standing. This registration or Certificate of Good Standing must be dated within twelve (12) months of the date of the submittal of this coverage form. Coverage will be issued in the company name as it is registered with the Mississippi Secretary of State.

Completed LCNOIs should be filed at least thirty (30) days prior to the commencement of construction. Discharge of storm water from large construction activities without written notification of coverage is a violation of state law.

Submittals with this LCNOI must include:

- A site-specific Storm Water Pollution Prevention Plan (SWPPP) developed in accordance with ACT5 of the General Permit
- A detailed site-specific scaled drawing showing the property layout and the features outlined in ACT5 of the General Permit
- A United States Geological Survey (USGS) quadrangle map or photocopy, extending at least one-half mile beyond the facility property boundaries with the site location and outfalls outlined or highlighted. The name of the quadrangle map must be shown on all copies. Quadrangle maps can be obtained from the MDEQ, Office of Geology at 601-961-5523.

Additional submittals may include the following, if applicable:

- Appropriate Section 404 documentation from U.S. Army Corps of Engineers
- Appropriate documentation concerning future disposal of sanitary sewage and sewage collection system construction
- Appropriate documentation from the MDEQ Office of Land & Water concerning dam construction and low flow requirements
- Approval from County Utility Authority in Hancock, Harrison, Jackson, Pearl River and Stone Counties

ALL QUESTIONS MUST BE ANSWERED (Answer "NA" if the question is not applicable)

MSR	10
(NUMBER TO BE	ASSIGNED BY STATE)

APPLICANT IS THE: ✓	OWNER PRIME CONTRACTOR	
(OWNER CONTACT INFORMATION	
OWNER CONTACT PERSON: Tim	Henning, Member	
OWNER COMPANY LEGAL NAME	HST Co, LLC	
OWNER STREET OR P.O. BOX: P.		
OWNER CITY: Mandeville	STATE: LA	ZIP: 70470
OWNER PHONE #: (985) 373-528	STATE: LA OWNER EMAIL: henningtr@a	aol.com
	CONTRACTOR CONTACT INFORMAT	
	PERSON: TBD	
	LEGAL NAME:	
	R P.O. BOX:	
	STATE:	
	PRIME CONTRACTOR EMAIL	
	FACILITY SITE INFORMATION	
FACILITY SITE NAME: Scarlett Gler		
FACILITY SITE ADDRESS (If the phyindicate the beginning of the project and	ysical address is not available, please indicate the near identify all counties the project traverses.)	est named road. For linear projects
STREET: Walker Road, West o	of Old Fort Bayou Road STATE: MS COUNTY: Jackson	
	_	ZIP: 39564
FACILITY SITE TRIBAL LAND ID (2 000
	es 7.84 seconds LONGITUDE: 88 degrees 48	
LAT & LONG DATA SOURCE (GPS (Please GPS Project Entrance/Start Point) or Map Interpolation):	Google Earth
TOTAL ACREAGE THAT WILL BE	DISTURBED 1: 36.13 acres	
IS THIS PART OF A LARGER COM	MON PLAN OF DEVELOPMENT?	YES□ NO ☑
IF YES, NAME OF LARGER COMM AND PERMIT COVERAGE NU	ON PLAN OF DEVELOPMENT:UMBER: MSR10	
ESTIMATED CONSTRUCTION PRO	DJECT START DATE:	2021-08-01
ESTIMATED CONSTRUCTION PRO	DJECT END DATE:	2023-08-01 YYYY-MM-DD
DESCRIPTION OF CONSTRUCTION	N ACTIVITY: Single-family residential subdivisi	on
	OPERTY USE AFTER CONSTRUCTION HAS BE	
SIC Code NAICS	6 Code	

NEAREST NAMED RECEIVING STREAM: Bayou Talla			
IS RECEIVING STREAM ON MISSISSIPPI'S 303(d) LIST OF IMPAIRED WATER BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's web site: http://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section)			
HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT?	YES□	NO☑	
ARE THERE RECREATIONAL STREAMS, PRIVATE/PUBLIC PONDS OR LAKES WITHIN ½ MILE DOWNSTREAM OF PROJECT BOUNDRY THAT MAY BE IMPACTED ACTIVITY?	YES□ BY THE CONS	NO ☑ TRUCTION	
EXISTING DATA DESCRIBING THE SOIL (for linear projects please describe in SWPPP): sandy clay			
WILL FLOCCULANTS BE USED TO TREAT TURBIDITY IN STORM WATER?	YES□	NO☑	
IF YES, INDICATE THE TYPE OF FLOCCULANT. □ ANIONIC POLYACRYLI □ OTHER	MIDE (PAM)		
IF YES, DOES THE SWPPP DESCRIBE THE METHOD OF INTRODUCTION, THE LOCATION OF WHERE FLOCCULATED MATERIAL WILL SETTLE?	TION OF INTR YES □	ODUCTION NO □	

 $^{^{1}}$ Acreage for subdivision development includes areas disturbed by construction of roads, utilities and drainage. Additionally, a housesite of at least 10,000 ft² per lot (entire lot, if smaller) shall be included in calculating acreage disturbed.

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS COVERAGE UNDER THIS PERMIT WILL NOT BE GRANTED UNTIL ALL OTHER REQUIRED MDEQ PERMITS AND APPROVALS ARE SATISFACTORILY ADDRESSED

IS LCNOI FOR A FACILITY THAT WILL REQUIRE OTHER PERMITS?		YES 🗹	NO □
IF YES, CHECK ALL THAT APPLY: \Box AIR \Box HAZARDOUS WAS	STE 🗆 I	PRETREATMEN	NT
☐ WATER STATE OPERATING ☐ INDIVIDUAL NPDES	✓ (OTHER: COE We	tlands Permit
IS THE PROJECT REROUTING, FILLING OR CROSSING A WATER CON OF ANY KIND? (If yes, contact the U.S. Army Corps of Engineers' Regulatory		YES □ mitting requiren	NO ☑ nents.)
IF THE PROJECT REQUIRES A CORPS OF ENGINEER SECTION 404 PER DOCUMENTATION THAT:	MIT, PROVID	E APPROPRIAT	ГЕ
The project has been approved by individual permit, or			
The work will be covered by a nationwide permit and NO NOTIFICATIO	N to the Corps	is required, or	
The work will be covered by a nationwide or general permit and NOTIFIC	CATION to the	Corps is require	d
IS A LAKE REQUIRING THE CONSTRUCTION OF A DAM BEING PROPO (If yes, provide appropriate approval documentation from MDEQ Office of Lan		YES □ am Safety.)	NO 🗹
IF THE PROJECT IS A SUBDIVISION OR A COMMERCIAL DEVELOPME BE DISPOSED? Check one of the following and attach the pertinent documents.		L SANITARY S	EWAGE
Existing Municipal or Commercial System. Please attach plans and specific associated "Information Regarding Proposed Wastewater Projects" form Hancock, Harrison, Jackson, Pearl River and Stone Counties. If the plans and sof LCNOI submittal, MDEQ will accept written acknowledgement from o collection and treatment that the flows generated from the proposed projection properly. The letter must include the estimated flow.	or approval fro pecifications ca fficial(s) respons	m County Utility A n not be provide sible for wastewa	Authority in d at the time
☐ Collection and Treatment System will be Constructed. Please attach a coppermit from MDEQ or indicate the date the application was submitted to	y of the cover of MDEQ (Date: _	the NPDES disc	charge)
☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Less that of General Acceptance from the Mississippi State Department of Health o engineer that the platted lots should support individual onsite wastewater	r certification fr	om a registered	
☐ Individual Onsite Wastewater Disposal Systems for Subdivisions Greater feasibility of installing a central sewage collection and treatment system m response from MDEQ concerning the feasibility study must be attached. It is not feasible, then please attach a copy of the Letter of General Acceptant certification from a registered professional engineer that the platted lots sl disposal systems.	ust be made by If a central colle ce from the Stat	MDEQ. A copy ction and wastev te Department of	of the vater system f Health or
INDICATE ANY LOCAL STORM WATER ORDINANCE WITH WHICH TH	E PROJECT M	UST COMPLY	:
<u>n/a</u>			

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Signature of Applicant (owner or prime contractor)

5/5/21 **Date Signed**

Tim Henning

Printed Name¹

Member HM bevelopment LLC

¹This application shall be signed as follows:

For a corporation, by a responsible corporate officer.

For a partnership, by a general partner.

For a sole proprietorship, by the proprietor.

For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official

Please submit the LCNOI form to:

Chief, Environmental Permits Division

MS Department of Environmental Quality, Office of Pollution Control

P.O. Box 2261

Jackson, Mississippi 39225

PRIME CONTRACTOR CERTIFICATION

LARGE CONSTRUCTION GENERAL PERMIT

Coverage No. MSR10

County Jackson

(Fill in your Certificate of Coverage Number and County)



By completing and submitting this form to MDEQ, the prime contractor is certifying that (1) they have operational control over the erosion and sediment control specifications (including the ability to make modifications to such specifications) or (2) they have day-to-day operational control of those activities at the site necessary to ensure compliance with the SWPPP and applicable permit conditions.

The owner(s) of the property and the prime contractor associated with regulated construction activity on the property have joint and severable responsibility for compliance with the permit. Notwithstanding any permit condition to the contrary, the coverage recipient and any person who causes pollution of waters of the state or places waste in a location where they are likely to cause pollution of any waters of the state shall remain responsible under applicable federal and state laws and regulations and applicable permits.

PRIME CONTRACTOR INFORMATION

PRIME CONTRACTOR CONTACT PERSON: TBD	PHONE NUMBE	R: ()	
PRIME CONTRACTOR COMPANY:			
PRIME CONTRACTOR STREET (P.O. BOX):			
PRIME CONTRACTOR CITY:	STATE:	ZIP:	
E-MAIL ADDRESS:			
OWNER INFORMATI	ION		
OWNER CONTACT PERSON: Tim Henning, Member	PHONE NUMBER: (985)	373-5288 (cell)	
OWNER COMPANY NAME: HST Co, LLC			
PROJECT INFORMAT	TON		
PROJECT NAME: Scarlett Glen (aka Walker Road) Subdivisio	n		
DESCRIPTION OF CONSTRUCTION ACTIVITY: Single-family res	idential subdivision		
PHYSICAL SITE ADDRESS (If the physical address is not available indicate the beginning of the project and identify all counties the project transfer. Walker Road	nte the nearest named road.	For linear projects,	
CITY: Ocean Springs COUNTY: Jacks	on		
I certify that I am the prime contractor for this project and will comply with all the requirements in the above referenced general NPDES permit. I further certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.			
	5/5/21		
Prime Contractor Signature ¹	Date Signed		
Tim Henning	Member		
Printed Name ¹	Title		

¹This application shall be signed as follows:

- application shall be signed as follows:

 For a corporation, by a responsible corporate officer.

 For a partnership, by a general partner.

 For a sole proprietorship, by the proprietor.

 For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

This Prime Contractors Certification form shall be submitted to:

Chief, Environmental Permits Division MS Department of Environmental Quality, Office of Pollution Control P.O. Box 2261 Jackson, Mississippi 39225

Revised: 10/25/16

Keep a Copy at the Construction Site and Also Submit this Page to:
Chief, Environmental Permits Division
MS Department of Environmental Quality, Office of Pollution Control
P.O. Box 2261
Jackson, Mississippi 39225-2261

Registration Form for Residential Lot Coverage under Mississippi's Large Construction Storm Water General Permit INSTRUCTIONS



Coverage recipients for residential subdivision construction that do not retain responsibility for permit compliance for individual lots are to furnish this Registration to buyers of individual lots at the time of purchase. In addition, the attached Requirements for Individual Lots in Residential Subdivisions, the Site Inspection and Certification Form and the Large Construction Storm Water General Permit shall also be given to buyers of individual lots at the time of purchase. This form is providing notification to buyers of lots in residential developments, that being part of a "larger common plan of development or sale," coverage is required under Mississippi's Large Construction Storm Water General Permit. To comply with the permit, the Registration Form must be submitted to MDEQ at the address listed above and a Storm Water Pollution Prevention Plan (SWPPP) must be developed and implemented to reduce pollutants in storm water discharges during construction activity. The SWPPP is not required to be submitted to MDEQ. A copy of the SWPPP and Registration Form must be kept at the construction site or locally available (i.e., able to be produced within an hour of being requested by a state or local inspector). See the following attachments for information on SWPPP development. In addition, a copy of the completed Registration Form(s) must be retained by the developer and submitted to the MDEQ when requesting termination of permit coverage. If the buyer or homebuilder sells the lot before a house is built, they must provide this form to the new owner. All questions must be answered. Answer "NA" if the question is not applicable. For further information, contact MDEQ at 601/961-5171 or access our website address: www.deq.state.ms.us/MDEQ.nsf/page/epd_epdgeneral.

ORGINAL COVERAGE RECIPIENT NAME:		BUYER / HOMEBUILDER:
COMPANY NAME:		COMPANY NAME (IF APPROPRIATE):
STREET OR P.O. BOX:		STREET OR P.O. BOX:
CITY: STATE:	ZIP:	CITY: STATE: ZIP:
PHONE # (INCLUDE AREA CODE):		BUYER PHONE # (INCLUDE AREA CODE):
RESIDENTIAL SUBDIVISON NAME:		
LARGE CONSTRUCTION STORM WATER I	PERMIT COVE	RAGE NUMBER: MSR10: 373-5288
LOT NUMBER(s) (attach an additional sheet if	necessary):	LOT SIZE(s):
PHYSICAL SITE ADDRESS (IF NOT AVAILA		
		,
STREET:		
CITY:	COUNTY: _	ZIP:
designed to assure that qualified personnel properly gathere persons who manage the system, or those persons directly reknowledge and belief, true, accurate and complete. I am average possibility of fine and imprisonment for knowing violations	ed and evaluated the responsible for gathe vare that there are si s. As a buyer / hom r General Permit an	pared under my direction or supervision in accordance with a system e information submitted. Based on my inquiry of the persons or sering the information, the information submitted is, to the best of my significant penalties for submitting false information, including the nebuilder, I further certify that I have read and understand the terms and that I am responsible for installing and maintaining the appropriate
		36.13 acres
Original Coverage Recipient Signature ¹		Date Signed
		5/5/21
Printed Name		Title
Buyer / Homebuilder Signature ¹		Date Signed
Printed Name		Title

REQUIREMENTS FOR LOTS IN RESIDENTIAL SUBDIVISION WHICH ARE COVERED BY THE LARGE CONSTRUCTION STORM WATER GENERAL PERMIT

As a homebuilder on a lot that is part of a regulated subdivision, you are also regulated under the State's storm water regulations and are required to take steps to keep soil and sediment from leaving the lot. When rain falls on exposed soil it can wash away valuable topsoil. It also carries sediment, nutrients and other pollutants into streets, gutters and ditches, where it then travels to lakes, rivers, streams or wetlands. Polluted runoff can cause excessive growth of aquatic weeds and algae and reduce recreational opportunities such as swimming and fishing. Sediment laden runoff can also destroy fish habitat reducing productive fishing opportunities. In addition, sediment-laden runoff can also clog pipes, ditches, streams and basins resulting in increased flooding and maintenance cost. Therefore, the homebuilder is required to minimize off-site damage from soil erosion, sediment leaving the construction site, and poor "housekeeping" practices. This requirement must be accomplished by developing and implementing a Storm Water Pollution Prevention Plan (SWPPP). Some examples of individual lot SWPPPs are attached for your convenience. Sketch the controls on a copy of your site plan. Narrative notes on the site plan may also be used in addition to the erosion control symbols.

In developing and implementing the SWPPP, controls must be used from each control group (vegetative, structural, housekeeping) to prevent erosion and sediment and other pollutants from leaving the site. Commonly used controls include:

Vegetative Controls

Temporary vegetation includes annual grasses that sprout quickly such as annual rye, browntop millet, oats, and winter wheat. These grow quickly with little care and can protect the soil from rainfall and act as a filter. They will not provide permanent cover. Permanent cover must be established as indicated below. When a disturbed area will be left undisturbed for fourteen (14) days or more, the appropriate temporary or permanent vegetative practices shall be implemented immediately.

Mulching is the placement of hay grass, woodchips, straw, or synthetic material on the soil to provide temporary cover to protect the soil from rain. Mulching may be the only option during the winter when seeding or sodding is not possible. Mulch must stay in place to be effective. Netting, stakes or chemical binders are used to anchor some types of mulch. Be sure to reinstall washed-out mulch and anchor if necessary until permanent cover is established.

Permanent stabilization is the establishment of a permanent vegetative cover on disturbed areas using either sod, perennial seed, trees or shrubs. When a disturbed area will be left undisturbed for fourteen (14) days or more, the appropriate temporary or permanent vegetative practices shall be implemented immediately. Silt fences, and other temporary measures must be removed following permanent stabilization.

Vegetative buffer zones are undisturbed or planted vegetated areas that are between construction activities and water bodies.

Structural Controls

Silt fences are temporary sediment barriers made of filter fabric buried at the bottom, stretched, and supported by stakes. The silt fence slows runoff and allows it to puddle or pond, so soil and sediment can settle out before leaving the site. The bottom eight to twelve inches of fence must either be sliced in or buried in a trench about four to six inches deep by four to six inches wide. **Silt fences that are not buried are improperly installed. They have no useful function, are a waste of money, and may result in enforcement action**. Stakes must be on the downstream side of the fence and spaced about 3 feet apart. Silt fence must not be installed across streams, ditches, waterways, or other concentrated flow areas. Place fences on the contour or perpendicular to the slope of the hill so that water and sediment will pond behind the fence. **Turn ends uphill** to prevent water going around the end. Install on the downslope, downhill, downstream, or low side of your lot. Keep the fence/barrier in place until grass is established.

Slope drains are piping or lined channels that carry storm water downslope without erosion. A good example would be a downspout extender. Extenders may be used to protect temporarily stabilized areas from roof runoff. Extenders can direct water from roof gutters to paved or grassed areas. Remove extenders following permanent stabilization.

Construction entrance/exits are stone stabilized site entrances which reduce sediment tracked onto public roads. Apply gravel or crushed rock to the driveway area and restrict traffic to this one route. Use 3 to 6 inch gravel over a geotextile fabric. At the end of each day sweep or scrape up any soil tracked onto the street. Limit "standard" vehicle access (including workers' vehicles) to only streets and roads, keep vehicles off of future yard areas; limit tracking of mud onto streets by requiring any required vehicles to use designated access drives. Streets are conduits for storm water, it is important to keep mud and sediment off the streets.

Stockpiles of sand or soil should be covered with plastic or tarps at the end of each workday, or surrounded with silt fence or haybales. Do not locate a stockpile near a street, storm drain inlet, or ditch.

Erosion control blankets or mats are machine-produced mats of straw or other fibers held together with netting that provide temporary or permanent stabilization in critical areas, such as slopes or channels, so that vegetation may be established.

Storm Drain Inlets on the lot must be protected by surrounding or covering with a filter material until final stabilization has been achieved.

Additional Controls: The above controls are the more common practices used at small construction sites. There are a number of other controls, techniques and manufactured product available. A few examples include hydro seeding, diversion berms, silt dikes and fiber logs. Even something as simple as a tarp or plastic may provide temporary cover for small exposed areas. You may wish to contact an erosion and sediment control specialist, local building official, or MDEQ for further information. In addition, MDEQ has several guidance manuals that may be of assistance and the internet has abundant guidance on construction BMPs.

Housekeeping Controls: Pollutants that may enter storm water from construction sites because of poor housekeeping include oils, grease, paints, gasoline, solvents, litter, debris, and sanitary waste. Good housekeeping practices include:


- Frequent cleaning of trash and debris, providing waste receptacles at convenient locations and providing regular collection of waste;
- Directing concrete trucks to the subdivision's designated wash-off area(s) or back to the Ready-Mix facility;
- Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
- Providing adequately maintained sanitary facilities.


In addition, you should be aware that State air regulations prohibit the open burning of residential solid waste.


Inspection Requirements. Homebuilders shall inspect all erosion controls as often as is necessary, but no less than weekly, to ensure that appropriate erosion and sediment controls have been properly constructed and maintained to prevent erosion and sediment from leaving the site and determine if additional or alternative control measures are required. The inspection results shall be recorded on the Site Inspection and Certification Form contained in the Large Construction Forms Package. MDEQ strongly recommends that homebuilders perform "walk through" inspections daily. It is a responsibility of the homebuilder to install additional and/or alternative erosion and sediment controls when existing controls prove to be ineffective in preventing sediment from leaving the site.


Retention of Records. All records, reports, forms and information resulting from activities required by this permit shall be retained for a period of at least three years from the date of the document origin.

Duty to Comply. Lot owners must comply with the applicable permit conditions. See Activities 3, 5, 6, 7, 10 and 11 in the Large Construction Storm Water General Permit for applicable conditions. Any noncompliance with the applicable permit conditions and aforementioned conditions including sediment leaving the lot constitutes a violation of the Mississippi Water Pollution Control Law and is grounds for enforcement action. It shall not be an acceptable defense that controls were not installed because subsequent activities would require their replacement or cause their destruction.

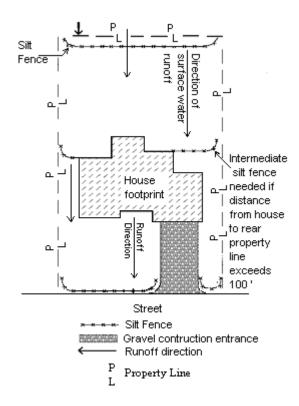

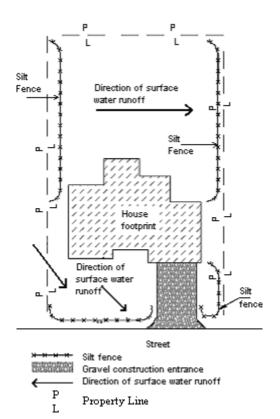

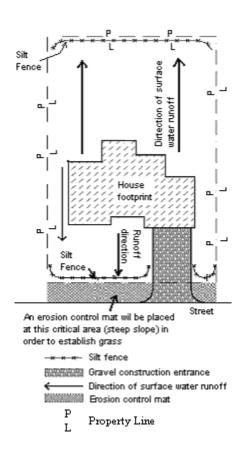

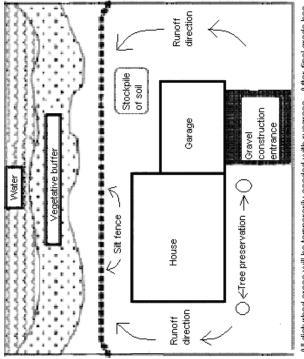

All disturbed areas will be temporarily seeded with ryegrass. After final grade has been reached, all disturbed areas will be sodded with bermuda grass.

Keep a Copy Available at the Permitted Facility or Locally Available Submit the Inspection Reports <u>Only if Requested</u> by the Mississippi Department of Environmental Quality (MDEQ)

LARGE CONSTRUCTION GENERAL PERMIT SITE INSPECTION AND CERTIFICATION FORM COVERAGE NUMBER (MSR10 _____)



INSTRUCTIONS

Results of construction storm water inspections required by ACT6 of this permit shall be recorded on this report form and kept with the Storm Water Pollution Prevention Plan (SWPPP) in accordance with the inspection documentation provisions of ACT9 of the this permit. Inspections shall be performed at least weekly for a minimum of four inspections per month. The coverage number must be listed at the top of all Inspection and Certification Forms.

Г	CO	VERAGE RECIPIENT INFO	RMATION	
OWNER/PRIME CON	TRATOR NAME:			
				_
			COUNTY:	-
			ZIP:	-
			PHONE NUMBER: ()	
		CONTACT		-
EMALE ADDRESS.				
DATE		NSPECTION DOCUMENTA	ΓΙΟΝ	
DATE (mo/day/yr)	TIME (hr:min AM/PM)	ANY DEFICIENCIES? (CHECK IF YES)	INSPECTOR(S)	
Deficiencies Noted Dur	ing any Inspection (give	date(s); attach additional sheets i	f necessary):	
Corrective Action Taker	n or Planned (give date(s); attach additional sheets if nece	ssary):	
		,,		
Based upon this inspection	which I or personnel under my	v direct supervision conducted. Licertify	that all erosion and sediment controls have been implemente	
maintained, except for those	deficiencies noted above, in		ntion Prevention Plan (SWPPP) and sound engineering practic	
			on or supervision in accordance with a system designed to assur	ra that
qualified personnel properly g	gather and evaluate the informa	ation submitted. Based on my inquiry o	f the person or persons responsible for gathering the information I am aware that there are significant penalties for submitting	on, the
	ssibility of fines and imprisonm		i am aware that there are significant penalties for Submitting	, 10150
Authorized Signature			Date	
Audionzeu signature			Member	

Title

Printed Name

Revised: 12/10/16

MAJOR MODIFICATION FORM FOR LARGE CONSTRUCTION GENERAL PERMIT Coverage No. MSR10 ____ County ____



INSTRUCTIONS

(check all that apply). This form	should be submitted with a	modified Storm V	uality at least 30 days in advance of the following ac Water Pollution Prevention Plan (SWPPP), updated collection and treatment information, as appropriate	USGS		
SWPPP details have been	SWPPP details have been developed and are ready for MDEQ review for subsequent phases of an existing, covered project.					
"Footprint" identified in t	"Footprint" identified in the original LCNOI is proposed to be enlarged.					
of new phases of existing subdivision Coverage recipients are authorized phases, under the conditions of the	ons must apply for separate I to discharge storm water a General Permit, <u>only upon re</u>	permit coverage associated with p eceipt of written r	Large Construction General Permit. A different development through the submittal of a new complete LCNOI paroposed expansions of existing subdivisions or substantification of approval by MDEQ. All other modified hACT6, S-1 (6) and S-2 (7) of the General Permit.	ickage. equent		
ALL INF	ORMATION MUST BE CO	MPLETED (indi	cate "N/A" where not applicable)			
	COVERAGE RE	CIPIENT INF	ORMATION			
COVERAGE RECIPIENT CONTA	ACT NAME:		TEL#()			
COMPANY NAME:	-					
CITY:	STATE:	ZIP:	E-MAIL:			
	PROJEC	T INFORMA	ΓΙΟΝ			
PROJECT NAME:						
CITY:						
ADDITIONAL ACREAGE TO BE			TOTAL PROJECT ACREAGE:			
with a system designed to assure inquiry of the person or persons information submitted is, to the b	that qualified personnel prowho manage the system, west of my knowledge and be	operly gathered or those persons belief, true, accur	repared under my direction or supervision in accordance and evaluated the information submitted. Based a directly responsible for gathering the information rate and complete. I am aware that there are sign I imprisonment for knowing violations.	on my		
Signature (must be signed by cover	erage recipient)	_	Date			
Printed Name			Title			
Please submit this form to:	Chief, Environmental Permits MS Department of Environme P.O. Box 2261	Division ental Quality, Office of	of Pollution Control			

Jackson, Mississippi 39225

Revised: 12/12/16

Environmental Permits for Industrial Facilities Request for Transfer of Permit, General Permit Coverage and/or Name Change

Instructions: For Ownership Change-Complete all Items on Page 1 (except Item VIII) and Page 2 (reverse side). For Name Change Only-Complete Items I, II, V, VI, VII, VIII, and Page 2 (reverse side).

Note-This form should be submitted to MDEQ when a transferal date is finalized but prior to the actual transfer.

New Authorized Signature ²	Previous Authorized Signature ²		
Print New Permittee ¹ Name	Print Previous Permittee ¹ Name		
By signature below, the recipient certifies that: 1) they are aware of the Board it has the financial resources and operational expertise and 3) ag this document. By signature below, the previous permittee is requestin The transfer of the permit(s) or permit coverage(s) will be by written no submittal of information regarding financial capability and past compliance.	rees to accept responsibility and liability for the pg that the permit(s) and/or permit coverage(s) be of tification from the Office of Pollution Control (Control (C	permit(s) listed on the back of transferred to the recipient.	
To:	Acquisition Date:		
We the undersigned request transfer of permit(s) and/or permit From:		orm.	
Item IX.	Title:	Date:	
New Name:	Authorized Signature ² :		
If Yes, Provide New Name for Permit Coverage.	Print Name:		
Will Facility Name Change? Yes No	Signature for Name Change		
Item VII.	Item VIII.		
Brief Description:	If yes, the appropriate applications and permits to change.		
Industrial Activity SIC Code:	Will Facility Operations Change? Yes	No	
Item V.	Item VI.		
Telephone: (Telephone: ()		
City: State: Zip:			
Street/P.O. Box:	Street/P.O. Box:		
Mailing Address:	Mailing Address:		
Previous Permittee ¹ :	New Permittee ¹ :		
Item III.	Telephone ()		
Telephone: ()	City: State:		
County:	Street/P.O. Box:		
City: State: MS Zip:	Mailing Address:		
Street:			
Location: (Do Not Use P.O. Box)	Name:		
Facility Name:	Item II. Responsible official after transfer or name char	ide.	
Item I.	I Hem II		

11 Miss. Admin. Code Pt. 6. Ch. 1

Mississippi Department of Environmental Quality/Office of Pollution Control P.O. Box 2261 Jackson, Mississippi 39225

(601) 961-5171

Item X. Storm Water	Item XI. Hazardous Waste ID Number
(Check One) A Storm Water Pollution Prevention Plan (SWPPP) is not required for the site. The recipient certifies that they have received a copy of the Office of Pollution Control approved SWPPP from the original owner. The recipient is submitting a new SWPPP, which is attached to this form. A copy of the SWPPP cannot be obtained from the original owner.	EPA ID No (Check One) An EPA Hazardous Waste ID Number is not required for the site. The site's EPA ID Number is listed above and a Notification of Regulated Waste Activity Form is attached.
Item XII. Permit(s) and/or C	Coverage(s) to be Transferred
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	Permit Type:
Permit/Coverage No.:	Permit/Coverage No.:
Permit Issuance Date:	Permit Issuance Date:
Date of General Permit Coverage:	Date of General Permit Coverage:
Permit Expiration Date:	Permit Expiration Date:
Permit Type:	OTHER INFORMATION:
Permit/Coverage No.:	
Permit Issuance Date:	
Date of General Permit Coverage:	
Permit Expiration Date:	
Page	2 of 2 DECEMBER 2016

INSPECTION SUSPENSION FORM

UNDER LARGE CONSTRUCTION STORM WATER GENERAL NPDES PERMIT MSR10



INSTRUCTIONS

Coverage recipients under Mississippi's Large Construction Storm Water General Permit may temporarily suspend required weekly inspections of erosion and sediment controls and monthly record keeping by submission of this form. Inspections may be suspended only when land disturbing activities have ceased, no further land disturbing activities are planned for a period of at least six (6) months, the site is stable with no active erosion, and vegetative cover has been established (see ACT9, S-1). The coverage recipient is responsible for all permit conditions during the suspension period and nothing in this condition shall limit the rights of MDEQ to take enforcement or other actions against the coverage recipient. Once land disturbing activities resume MDEQ must be notified and all inspections and record keeping required by the permit must also resume. Color photographs, representative of the construction site, must be submitted with this inspection form.

COVERAGE	E RECIPIENT INFORMAT	TION
COVERAGE RECIPIENT CONTACT PERSON:		
COMPANY NAME:		
STREET OR P.O. BOX:		
CITY:		
PHONE # (INCLUDE AREA CODE):	E-MAIL:	
PRO	JECT INFORMATION	
CONSTRUCTION STORM WATER GENERAL PE		
CITY:		
I certify under penalty of law that this document and all with a system designed to assure that qualified personne inquiry of the person or persons who manage the system information submitted is, to the best of my knowledge a penalties for submitting false information, including the that: land disturbing activities have ceased, no further months, the site is stable with no active erosion, and	el properly gathered and evaluated to n, or those persons directly responsi- and belief, true, accurate and complete possibility of fine and imprisonme er land disturbing activities are p	the information submitted. Based on my lible for gathering the information, the ete. I am aware that there are significant ent for knowing violations. I further certify planned for a period of at least six (6)
Signature (must be signed by coverage recipient)		Date Signed
Printed Name	<u></u>	Title
Please submit this form to: Chief, Environmenta MS Department of E	al Permits Division Environmental Quality, Office of Polluti	ion Control

P.O. Box 2261

Jackson, Mississippi 39225

Revised: 12/10/2016

Request for Termination (RFT) of Coverage



LARGE CONSTRUCTION GENERAL PERMIT Coverage No. MSR10 County

(Fill in your Certificate of Coverage Number and County)

This form must be submitted within thirty (30) days of achieving final stabilization (see ACT10, S-1 of general permit). Failure to submit this form is a violation of permit conditions.

The signatory of this form must be the owner or operator (prime contractor) who is the current coverage recipient (rather than the project manager or environmental consultant).

(Please Print or Type)

Project Name: Physical Site Street Address (if not available, indicate nearest named road): County: ____ Coverage Recipient Company Name: Street Address / P.O. Box: Coverage Recipient Contact Name and Position: _____ Tel. #: (____) Has another owner(s) or operator(s) assumed control over all areas of the site that have not reached final stabilization? RESIDENTIAL SUBDIVISIONS: YES. A copy of the Registration Form for Residential Lot Coverage for each lot or out parcel that has been sold and a site map, indicating which lots have been sold, are attached. **◯** NO. Coverage may not be terminated until all areas have reached final stabilization. **COMMERCIAL DEVELOPMENT:** YES. A copy of the site map, indicating which out-parcels have been sold, is attached. NO. Coverage may not be terminated until all areas have reached final stabilization. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fines and imprisonment for knowing violations. I understand that by submitting this Request for Termination and receiving written confirmation, I will no longer be authorized to discharge storm water associated with construction activity under this general permit. Discharging pollutants associated with construction activity to waters of the State without proper permit coverage is a violation of state law. I

also understand that the submittal of this Request for Termination does not release an owner or operator from liability for any violations of this permit or the Clean

Signature

¹This application shall be signed according to the General Permit, ACT11, T-7 as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.

Water Act.

Authorized Name (Print)

- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by principal executive officer, mayor, or ranking elected official.

After signing please mail to: Chief, Environmental Permits Division


MS Department of Environmental Quality, Office of Pollution Control

Telephone

P.O. Box 2261

Jackson, Mississippi 39225

Date Signed

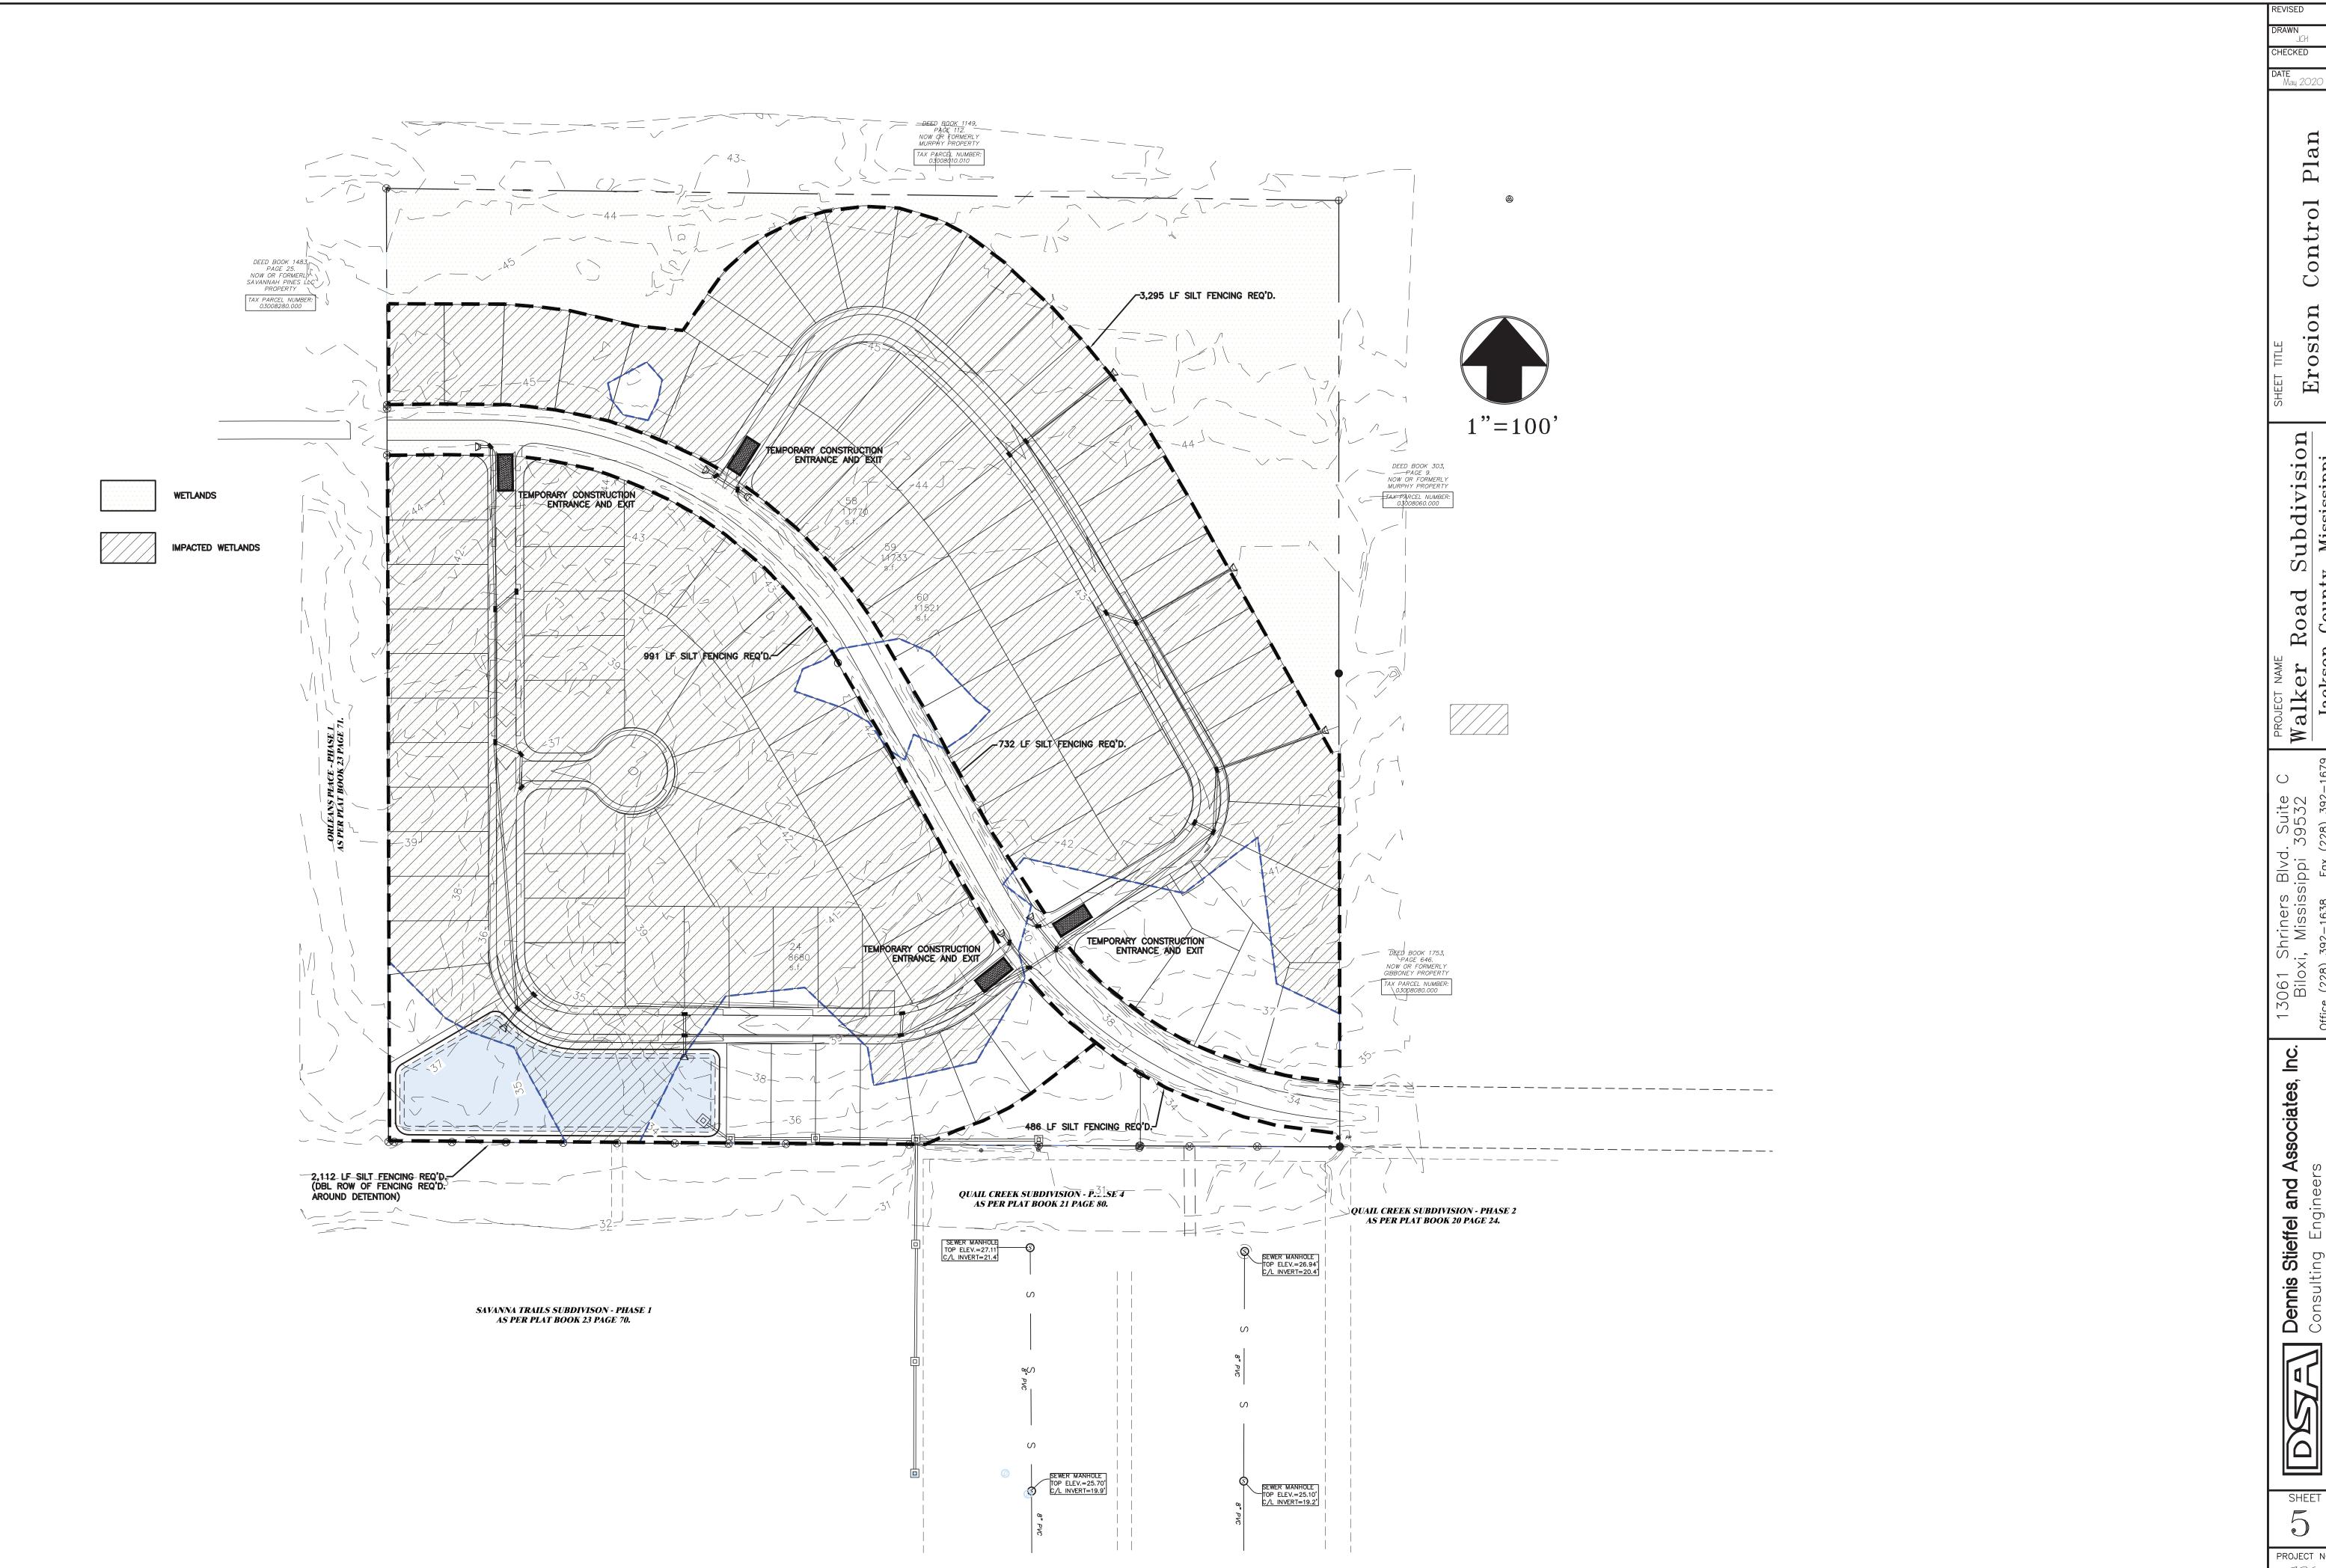

Subdivision ty, Mississippi Road Count

SHEET

PROJECT NO. 726

SHEET PROJECT NO

STORM WATER POLLUTION PREVENTION PLAN

1) Vegetative buffer zones shall be maintained between land disturbing activities and perennial water bodies or planted vegetated areas. Buffer zones shall provide a minimum 150-ft buffer and shall be no less than 15 feet in width.

Vegetative controls shall be initiated no later than the next work day following any clearing, grading, excavating or other land disturbing activities which have temporarily or permanently ceased on any portion of the site and will not resume for a period of fourteen (14) days or more. Vegetative controls shall consist of Bermuda grass or other suitable ground cover grasses which will blend with the native vegetation and provide the desired stabilization and erosion protection. Solid sod may be used in areas prone to erosion due to isolated concentrations of surface drainage.

3) Structural controls shall consist of silt fencing, straw bales, rip-rap and/or erosion matting or some combination thereof at all points of discharge into existing drainage systems. The controls are to be left in place and maintained for the duration of the project. Upon satisfactory stabilization of site, structural controls shall be removed along with any and all silt build-up. Structural controls are to eliminate tracking of sediment in order to prevent any damage to the downstream tributaries or water ways and/or associated wetland areas. Best management practices (BMPs) will be utilized throughout the duration of the construction of the project. Stone-stabilized construction entrances (6" thick and 50' long) will be used to prevent sediment from being tracked onto public roads with tires being

4) Inspection of all disturbed areas, erosion, sediment controls and outfalls/discharge points are required after rain events that produce a discharge and at least weekly for a minimum of four (4) inspections per month. Make needed repairs within 24 hours. All accumulated sediment shall be removed from structural controls when sediment deposits reach 1/3 to 1/2 the height of the control. For sediment basins, accumulated sediment shall be removed when the capacity has been reduced by 50%. Replace non-functional silt fence. Maintain all vegetated areas to provide proper ground cover and re-grass, fertilize and mulch as needed. Any silt removed shall be disposed of in nonwetland areas.

5) Topsoil shall be stockpiled and reapplied to disturbed areas at a depth of 2 inches on 3:1 slopes and 4 inches on flatter slopes with an admixture of commercial grade 13-13-13 fertilizer.

6) Heavy equipment use shall be avoided in re-grassed areas. If compaction cannot be avoided, the top 4 inches of the soil bed shall be tilled/scarified before re-vegetation. Any necessary fertilizer or other soil amendments shall be added during the tilling process. 7) Steep slopes that cannot be avoided shall have silt fences for all down slope boundaries (and for those side slope boundaries deemed appropriate by individual site conditions) with the exception of those areas incorporating sediment basins with a calculated volume of run-off from a 2-yr, 24-hr storm or 3,600 cubic feet of storage per acre drained as per the Erosion Control & Drainage Plan. Silt fencing shall be installed at the downstream boundaries of the proposed project to protect areas that are to remain undisturbed. 8) Storm drain inlets that could potentially receive storm water from construction activities shall be protected by surrounding with silt fence until final stabilization has been achieved. Additionally, the lower orifice in the outfall structure shall be temporarily plugged until the completion of the construction of the project.

9) Maintenance of site and all erosion controls will be the Contractor's responsibility during construction and the Home Owner's Association (HOA) post construction with the Municipality having perpetual right of access via easements for emergency purposes.

SEQUENCE OF CONSTRUCTION ACTIVITIES:

1) Silt fencing structural controls to be installed prior to any land disturbing activities taking place.

Construct construction entrance/exit(s).

Construct sedimentation/detention basin(s) with appropriate grassing and/or rip-rap.

4) Rough grade site, construct diversions and drainage ways, stockpile topsoil and install silt fence around stockpile, install utilities, culverts and inlets with associated silt fencing. Install vegetative controls.


Construct roadways, drives, parking and buildings.

Perform final grading, grassing and landscaping operations.

8) After site is stabilized, remove all temporary measures and any excess sedimentation from basins.

HOUSEKEEPING PRACTICES: All equipment maintenance and repair shall be done off-site. The site is to be cleaned of trash and construction debris on a weekly basis so as to prevent the spreading of such onto adjacent properties. Paints, solvents, fertilizers, and any other potentially toxic materials shall not be stored on site. Portable sanitary facilities will be provided for construction workers. A designated pit area is required near construction entrance(s) for concrete truck wash-out. Site shall be inspected weekly for spills and leaks. Any spills or leaks detected will be immediately cleaned with a dry absorbent material and absorbent oil socks shall be placed around any adjacent drainage inlets. Upon completion of construction, excessive sedimentation and/or pollutants shall be removed from sedimentation basin. Emergency spill kit and telephone shall be available for use for site. Any spills in danger of migrating off-site shall be immediately reported to the National Response Center at (800) 424-8802.

POST CONSTRUCTION/STORM WATER MANAGEMENT MEASURES: The individual lot/site protection plan consists of the installation of sedimentation/detention basin(s), silt fencing, hay bales and/or other erosion/siltation control measures in a continuous band across the downhill side of all disturbed areas including areas adjacent to streets. Under no circumstances will silt laden run-off be allowed to escape the site. Additionally, these requirements are to be an integral part of any sales contracts and recorded covenants for the development. Sedimentation/detention basin(s) are to be thoroughly cleaned of excess sediment after construction. Grassing and/or rip-rap will be placed at concentrated storm water discharge points to prevent erosion from high run-off velocities.

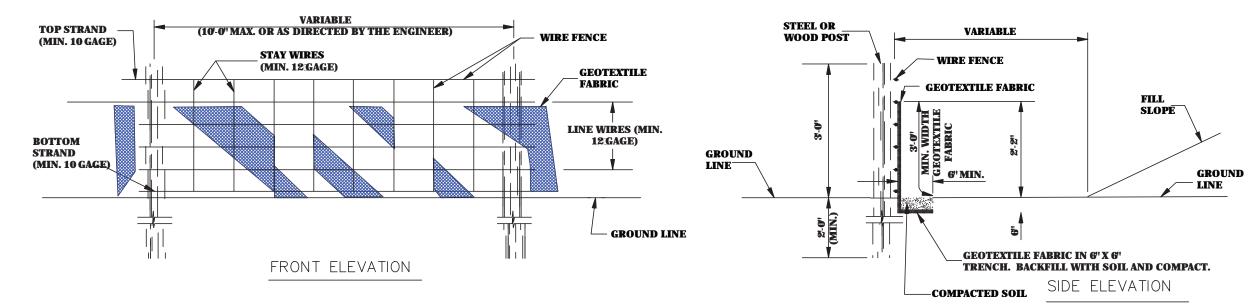


I TEMPORARY SILT FENCING


NOTE: I.) ALL DISTURBED AREAS TO BE SEEDED OR SODDED 2.) SIDE SLOPES OF DETENTION POND TO BE SODDED

3.) SOLID SOD TO BE ADDED 3' BEHIND THE BACK OF CURB

FOR THE ENTIRE LENGTH OF ROADWAY

4.) CONTRACTOR RESPONSIBLE FOR KEEPING STREETS CLEAN

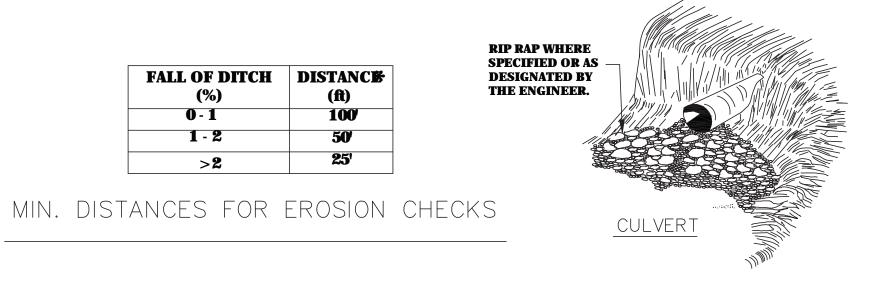

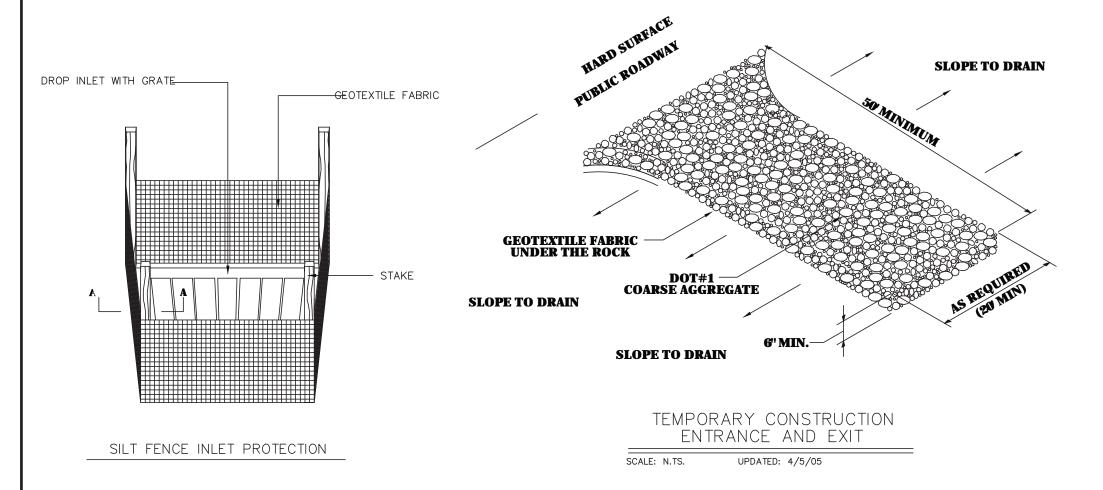

GENERAL NOTES:

1. EROSION CONTROL SEQUENCE SHALL BE AS FOLLOWS: (A.) SILT FENCING TO PROTECT EXISTING WETLANDS SHALL BE INSTALLED

(B.) DETENTION POND TO BE CONSTRUCTED

(C.) SILT FENCING AND HAY BALES TO BE INSTALLED AROUND ALL DRAINAGE STRUCTURES (D.) APPROPRIATE EROSION CONTROL STEPS TAKEN TO STABILIZE SIDE SLOPES AND SWALES

(E.) ALL DISTURBED AREAS TO BE GRASSED EXCEPT WHERE SODDING IS REQUIRED 2. CONTRACTOR SHALL BE RESPONSIBLE FOR THE IMPLEMENTATION OF ALL EROSION CONTROL MEASURES

NUMBER----- "SEE CONTRACT DOCUMENTS FOR COPIES OF PERMITS" 3. CONTRACTOR SHALL INSPECT THE INSTALLED EROSION CONTROL ITEMS AT LEAST ONCE EVERY SEVEN-CALENDAR DAYS AND PROVIDE ANY MAINTENANCE REQUIRED TO PREVENT EROSION AND ADVERSE IMPACTS TO RECEIVING STREAMS

IN ACCORDANCE TO THE WETLANDS PERMIT NUMBER- SAM-2011-1271-TMC , AND THE D.E.Q. (SWPP) PERMIT

4. ENTIRE SITE SHALL BE CLEARED AND GRUBBED UNLESS OTHERWISE NOTED, HOWEVER SPECIAL CARE SHOULD BE TAKEN TO PROTECT ANY ORNAMENTAL TREES THAT COULD REMAIN WITH-IN THIS PROJECT.


SILT FENCE NOTES:


. WIRE SHALL BE MINIMUM OF 32" IN WIDTH AND SHALL HAVE A MINIMUM OF 6 LINE WIRES WITH 12" STAY SPACING.


2. GEOTEXTILE FABRIC SHALL BE A MINIMUM OF 36" IN WIDTH AND SHALL BE FASTENED

ADEQUATELY TO THE WIRE AS DIRECTED BY THE ENGINEER. 3. STEEL POST SHALL BE 5'-0" IN HEIGHT AND OF THE SELF-FASTENER ANGLE STEEL TYPE WOOD POST SHALL BE A MINIMUM OF 5-0' IN HEIGHT AND 3" OR MORE IN DIAMETER. WIRE FENCE SHALL BE FASTENED TO WOODEN POST WITH NOT LESS THAN 9 GAGE

4. GEOTEXTILE FABRIC MEETING THE TYPE II MATERIAL REQUIREMENTS AND INSTALLED ACCORDING TO SPECIFICATIONS MAY BE USED WITHOUT WIRE FENCE.

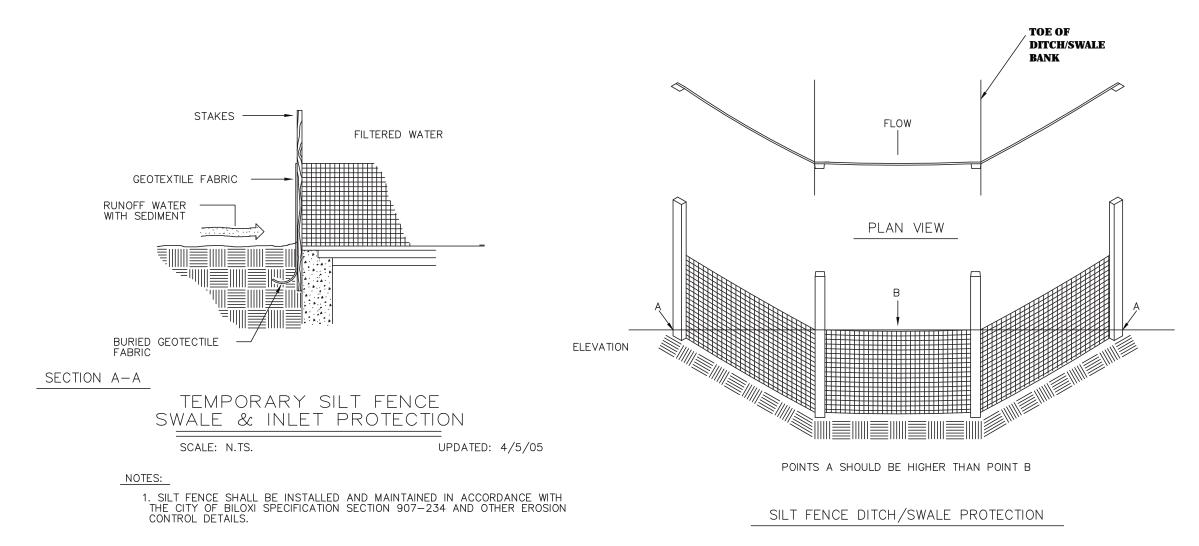

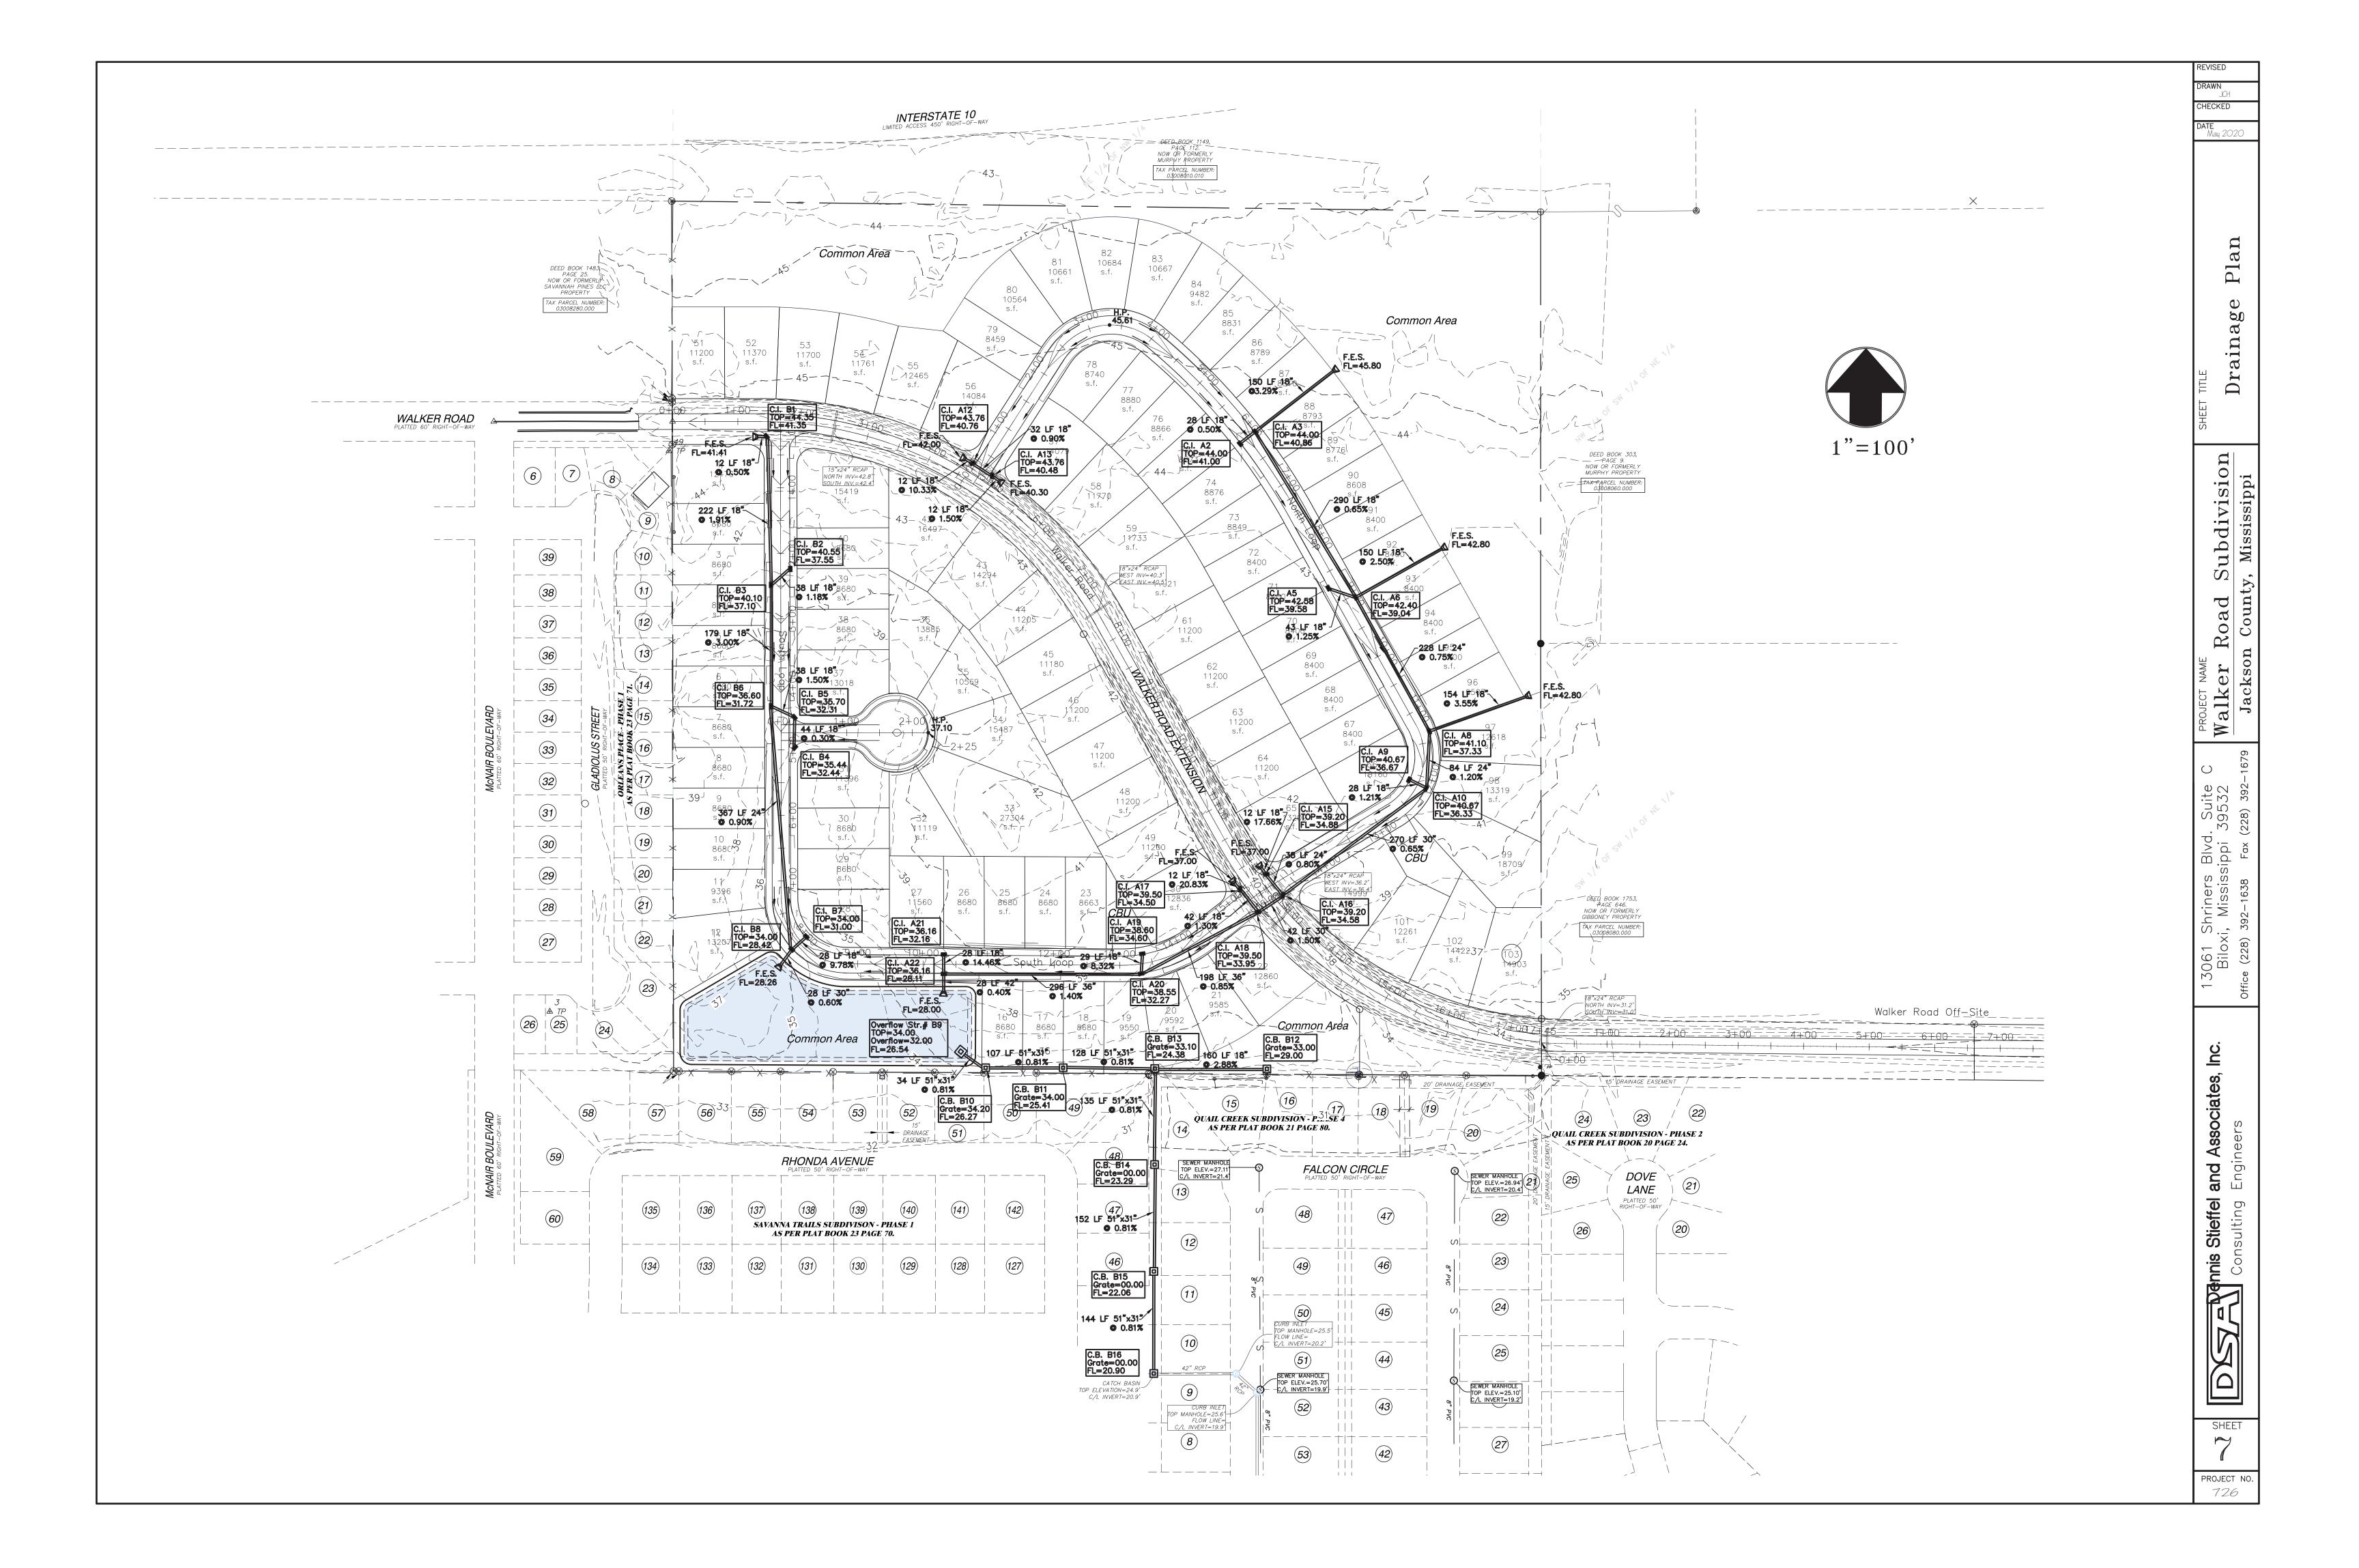

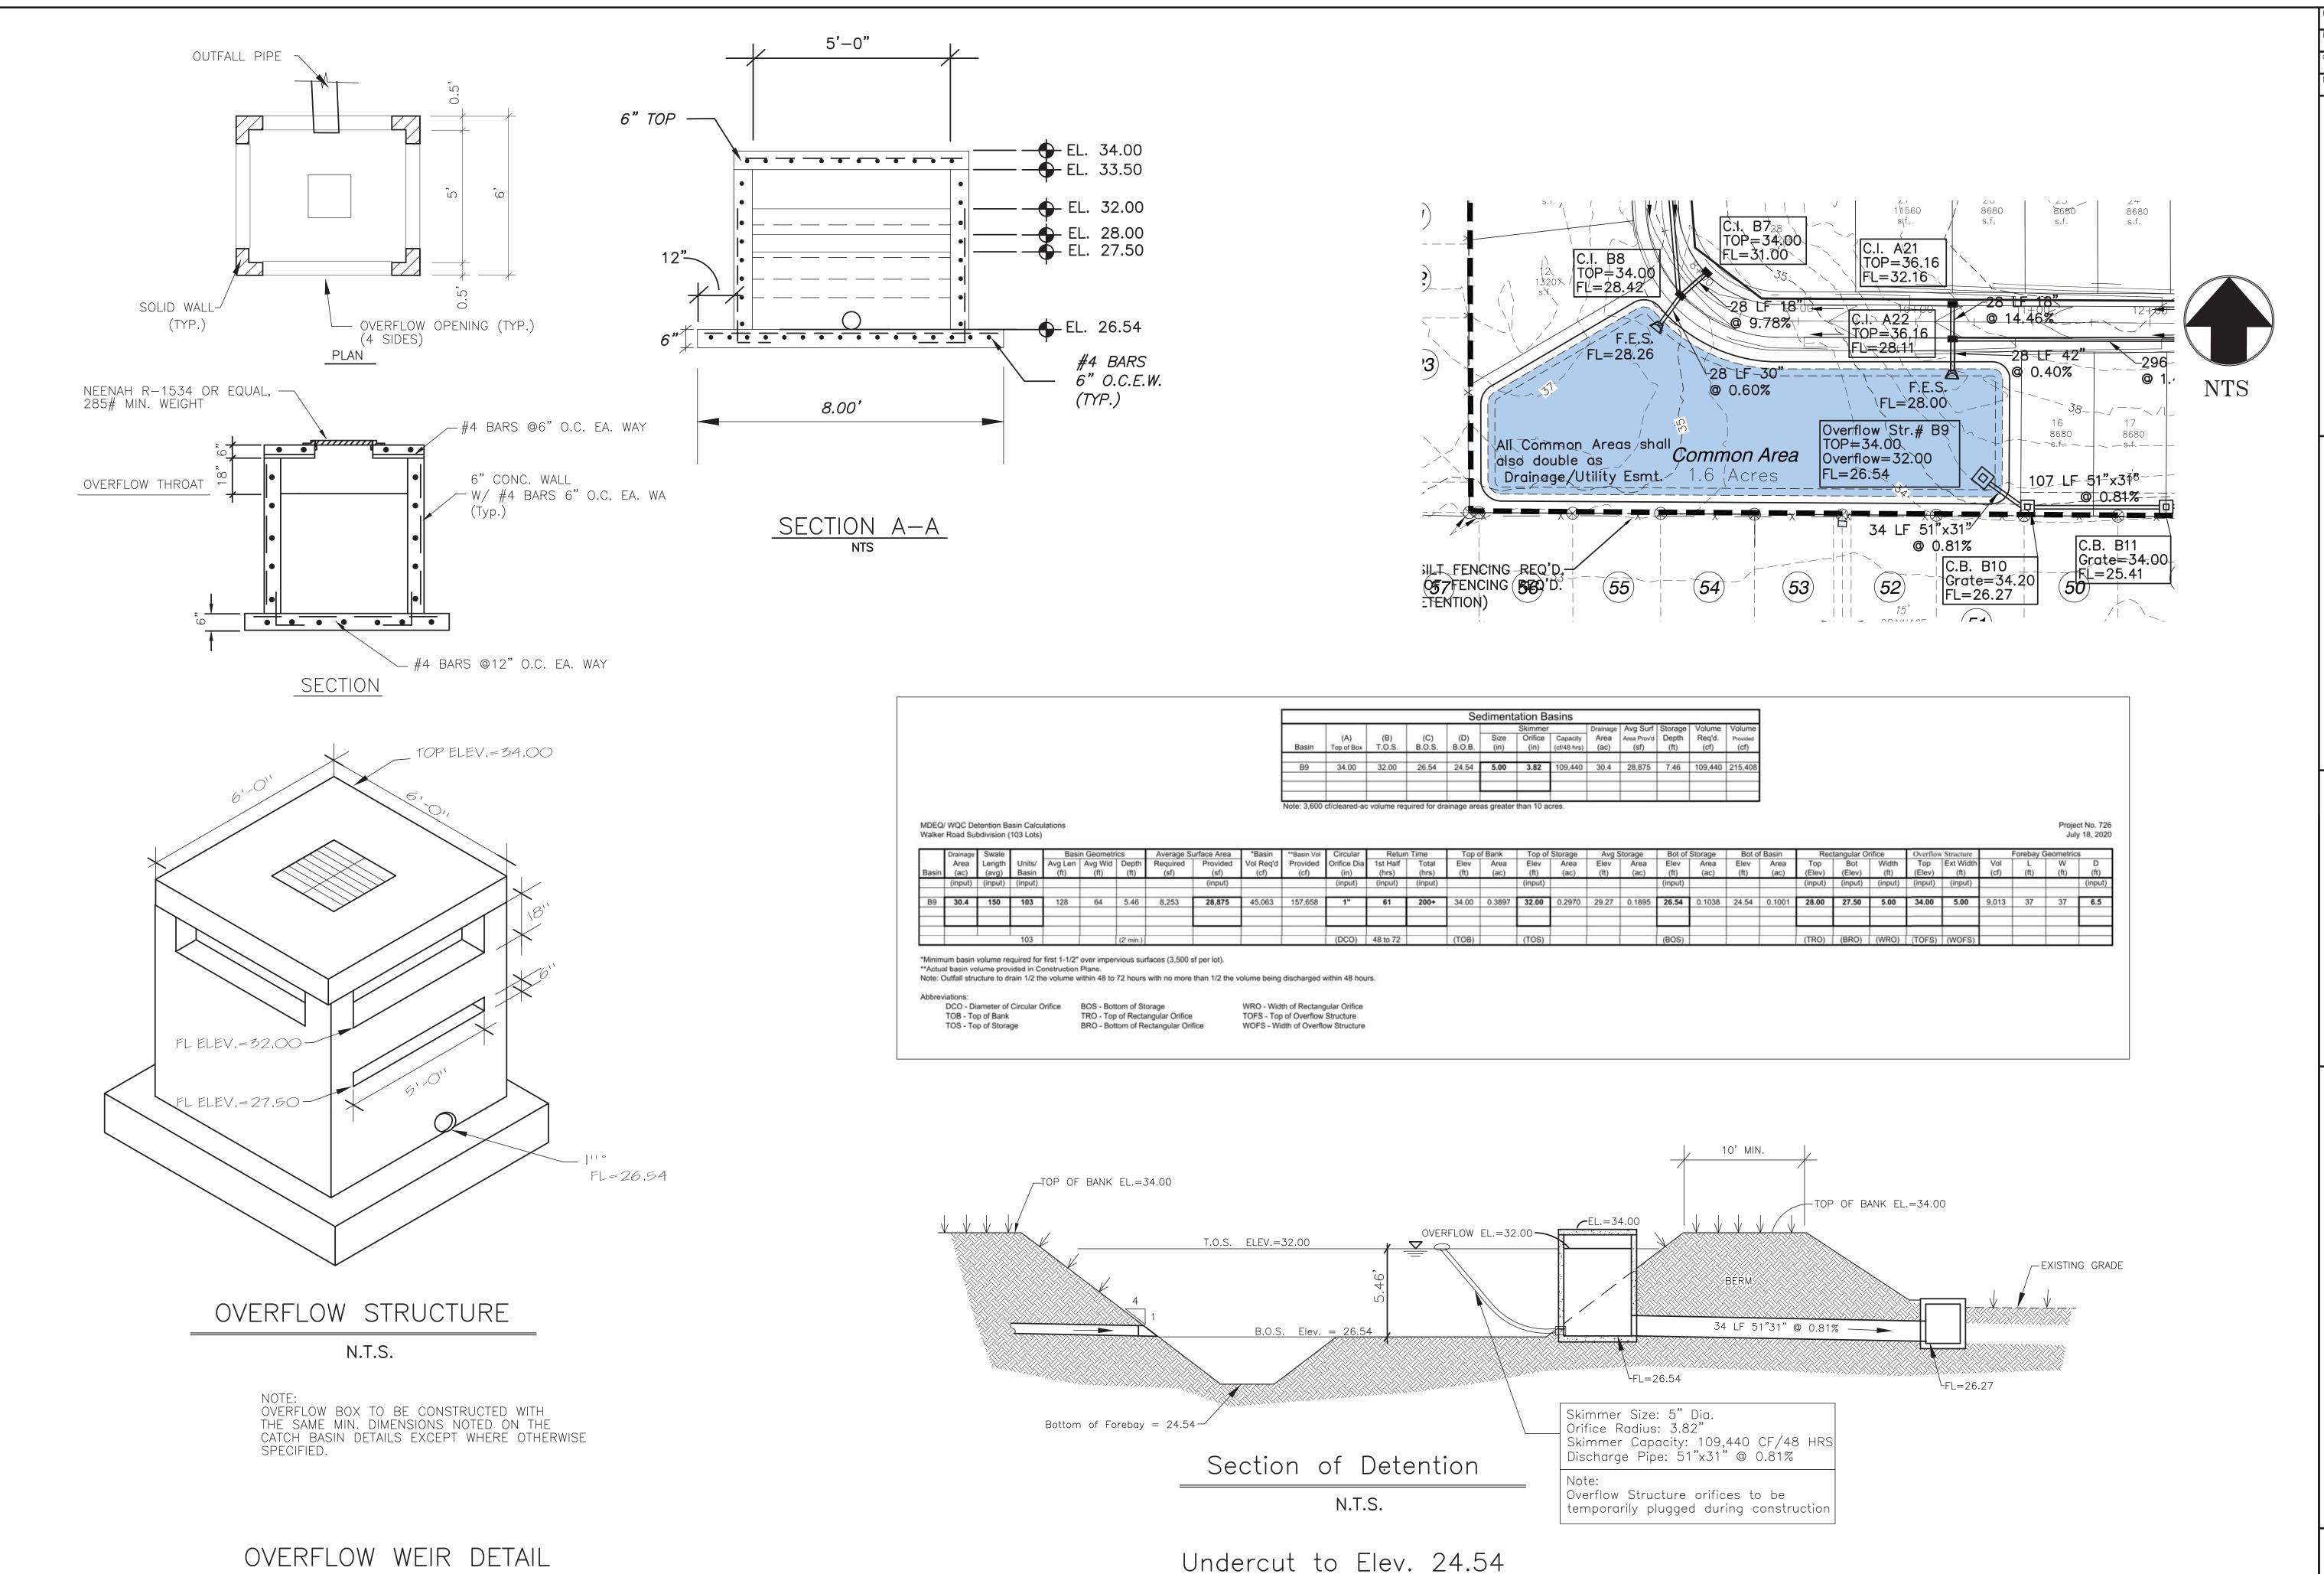

N.T.S.

D Detention

Subdivision ty, Mississippi Road Count

alker \geqslant

Consulting 5

SHEET

PROJECT NO