MISSISSIPPI ASBESTOS DEMOLITION/RENOVATION NOTIFICATION FORM

Mail notification to: MDEQ Asbestos and Lead Branch, 515 E. Amite Street, Jackson, MS 39201

MDEQ Use Only: ヌEmail □Mail □Hand Delivery	Postmark (mai	l only)	Date Re 04	ceived I-14-2024	Al Number
I. Type of Notification (O=Original R=Revised 0	C=Canceled A=	Annual): O			
II. TYPE OF OPERATION (D=Demo O= Ordere	ed Demo R=Ren	ovation E=Emer. Re	novation):	D	
III. FACILITY DESCRIPTION (Include building n	ame, number ar	nd floor or room numb	er):		
Bldg. Name: Budget Inn					
Address: 1673 Cecil Shelton Road		-		T	
_{City:} Grenada		State: MS		Zip: 38901	
Site Location: 1st and 2nd Floor Guest	Rooms Ceilir	ngs		_{Tel:} 662-614-15	12
Building Size: Appx.25,000 Sq Ft Present Use	: VACANT	# of Floors: 2		Age in Years: Appx	40+
	i i	Prior Use: Motel			
IV. FACILITY INFORMATION (Identify owner, as	sbestos removal	contractor, and other	operator)		
OWNER NAME Greater Grenada Partn	ership				
Address: 95 SW Frontge RD					
City: Grenada		State: MS		zip: 38901	
Contact: Harrison Matthews				Tel; 662-229-95	502
ASBESTOS REMOVAL CONTRACTOR: Edwa	ard Clay - EA	AC Environmenta	al		
Address: 4546 Cal-Steens Road					
City: Caledonia		State: MS		Zip: 39740	
Contact: Edward Clay				Tel: 662-386-63	86
Certification Number: ABC-00005192			Expiration	on Date: 11-03-24	
OTHER OPERATOR: Double S, Inc.					
Address: 200 Houston Road					
City: Grenada		State: MS		Zip: 38901	
Contact: Scooter Shields				Tel 662-614-15	12:
V. WAS SITE INSPECTED TO DETERMINE PR	RESENCE OF A	SBESTOS? (Yes/No): YES		
WAS ASBESTOS PRESENT? (Yes/No): Yes			Inspection	on Date: 07-08-23	
Inspector: Brad McKnight	Certification	Number:ABI-0000	1685	Expiration	Date: 06-07-24
VI. SUSPECT MATERIALS SAMPLED AND PR	ROCEDURES U	SED TO DETECT TH	E PRESE	NCE OF ASBESTOS	:
Ceiling Texture, VCT, Carpet with Mast Analyzed by PLM		with Mastic, Dry	wall Joir	nt Compound, Ext	erior Stucco
see attached	<u>·</u>				
VII. QUANTITY OF RACM TO BE REMOVED	Chrysot	ile Asbestos fou	ınd in C	Ceiling Texture	
Pipes (LN FT):	Surface Area (S	Q FT): Appx 22,4	00	Volume of Facility Co	emponents (CU FT):
VIII. QUANTITY OF NONFRIABLE ASBESTOS	NOT REMOVE	iD:			
Category I:		Cat	egory II:		
IX. SCHEDULED DATES ASBESTOS REMOVA	AL (MM/DD/YY)	Start: 05-10-24		Complete:	05-24-24
X. SCHEDULED DATES DEMO/RENOVATION				Complete:	06-28-24

XI. DESCRIPTION OF PLANNED DEMOLITION OR RENOVA	ATION WORK, A	ND METHOD(S	S) TO BE USED:	
Using "Wet Method" the ACM will be rem	oved with h	and tools	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	
XII. DESCRIPTION OF WORK PRACTICES AND ENGINEE DEMOLITION OR RENOVATION SITE:	RING CONTROL	S TO BE USEI	D TO PREVENT EM	ISSIONS OF ASBESTOS AT THE
Containment, Negative Air Machines, Airless	Sprayer usi	ng water a	nd surfactant fo	or Wet Method Removal,
Double Bag ACM in 6 mil poly XIII. WASTE TRANSPORTER #1				
EAC Faulter and all				
Name: EAC Environmental				
Address: 4564 Cal Steens RD	State: MS		25-02-7-03-91	
City: Caledonia	State: ***		zip: 39740	
Contact Person: Ed Clay			Tel: 662-386-6	386
WASTE TRANSPORTER #2 Name: Waste Pro				
Address: 1600 S 12th ST			r	
City: Columbus	State: MS		Zip: 39701	
Contact Person: RuthAnn Farris			Tel:	
XIV. WASTE DISPOSAL SITE				
Name: RoBo Landfill				
Address: 6447 Wahalak Road	MC		r	
City: Scooba	State: MS		Zip: 39358	
Contact Person: Roland Edmonds			Tel: 662-798-4	795
XV. IF DEMOLITION ORDERED BY A GOVERNMENT AGEN	ICY, PLEASE IDE	ENTIFY THE A	GENCY BELOW:	
Name:		Title:		
Authority:				2 3-3
Date of Order (MM/DD/YY):	!	Date Ordered to	o Begin (MM/DD/YY)	r.
XVI. FOR EMERGENCY RENOVATIONS:				
Date and Hour of Emergency (MM/DD/YY): Description of the sudden unexpected event:				
Description of the sudden unexpected event:				
Explanation of how the quant count is a first transfer of the				
Explanation of how the event caused unsafe conditions or would	d cause equipme	nt damage or a	ın unreasonable fina	ncial burden:
XVII. DESCRIPTION OF PROCEDURES TO BE FOLLOWED NONFRIABLE ASTESTOS MATERIAL BECOMES CRUMBL	IN THE EVENT	THAT UNEXPE	ECTED ASBESTOS CED TO POWDER:	IS FOUND OR PREVIOUSLY
Contain material, notify owner, and MDEC	Į			
XVIII. I CERTIFY THAT AN INDIVIDUAL TRAINED IN THE P ONSITE DURING THE DEMOLITION OR RENOVATION, AN THIS PERSON WILL BE AVAILABLE FOR INSPECTION DU	D EVIDENCE TH	AT THE REOL	IRED TRAINING H.	RT 61, SUBPART M) WILL BE AS BEEN ACCOMPLISHED BY
Edward A. Clay	Edh	vnd A	: Clay	04-14-24
Type or Print Name	(Signature of Ow	ner/Operator)		(Date)
XIX. I CERTIFY THAT THE ABOVE INFORMATION IS CORRIED EDWARD A. Clay		and A.C	d- 1	04 14 24
Type or Print Name	(Signature of Ow		7	04-14-24 (Date)
W.				v,

Asbestos Survey Report

Cecil Shelton Properties - Knights Inn and Budget Inn I-55 and Highway 8 Grenada, Mississippi

August 7, 2023 | Terracon Project No. EB237097



PREPARED FOR:

Greater Grenada Partnership Grenada, Mississippi

Prepared by:

Terracon Consultants, Inc. Ridgeland, Mississippi



Nationwide Facilities Environmenta

Terracon.com • Materials



859 S. Pear Orchard Road Ridgeland, Mississippi 30043 P (601) 956-4467 **F** (601) 956-9533 Terracon.com

August 7, 2023

Greater Grenada Partnership 95 SW Frontage Road Grenada, Mississippi 38901

Attn: Mr. Matthew Harrison

P: (662) 229-9502

E: matthew@grenadameansbusiness.com

RE: **Asbestos Survey Report**

Cecil Shelton Properties - Knights Inn and Budget Inn

I-55 and Highway 8 Grenada, Mississippi Terracon Project No. EB237097

Dear Mr. Harrison:

Terracon Consultants, Inc. (Terracon) is pleased to submit the attached report for the above referenced site to Greater Grenada Partnership. The purpose of this report is to present the results of an asbestos survey performed on July 8, 2023. This survey was conducted in general accordance with your proposal June 6. 2023. Terracon understands that this survey was requested due to planned demolition of the buildings.

Asbestos-containing materials (ACM) were identified in the suspect materials sampled and submitted for analysis from both buildings at the subject site. Please refer to the attached report for details.

Terracon appreciates the opportunity to provide this service to Greater Grenada Partnership If you have any questions regarding this report, please contact the undersigned at (769) 233-2072.

Sincerely,

Terracon Consultants, Inc.

Brad McKnight, C.E.S.

Project Industrial Hygienist

Authorized Project Reviewer

Attachments





TABLE OF CONTENTS

EXEC	JTIVE	SUMMAR	ξΥ	1
1.0	INTF	RODUCTI	ON	1
	1.1	Project Ob	jective	1
	1.2	Reliance .		1
2.0	BUIL	DING DE	SCRIPTION	2
3.0	ASB	ESTOS S	URVEY	2
	3.1	Field Activ	ities	2
		3,1,1	Visual Assessment	
		3.1.2	Physical Assessment	2
		3.1.3	Sample Collection	3
		3,1,4	Sample Analysis	
4.0	REG	ULATOR	Y OVERVIEW	3
5.0	FINE	DINGS	·	4
6.0	REC	OMMEN	DATIONS	5
7.0	LIMI	TATIONS	GENERAL COMMENTS	5

APPENDICES

APPENDIX A	ASBESTOS	SURVEY	SAMPLE	SUMMARY

- APPENDIX B ASBESTOS LABORATORY ANALYTICAL REPORT
- APPENDIX C PHOTOGRAPHS OF SAMPLED AREAS
- APPENDIX D SAMPLE LOCATION DRAWING
- APPENDIX E CERTIFICATIONS



EXECUTIVE SUMMARY

The purpose of this report is to present the results of an asbestos survey performed at the Knights Inn and Budget Inn located on I-55 and Highway 8 in Grenada, Mississippi. We understand that this survey was requested due to proposed demolition activities. Forty-eight (48) bulk samples were collected from identified suspect asbestos-containing materials (ACM). Based upon this survey, asbestos was identified in the samples collected from the Knights Inn in the joint compound of the wall board system, ceiling surface material, and the white $12'' \times 12''$ floor tile and black mastic. In the samples collected from the Budget Inn, asbestos was identified in the ceiling surface material.

1.0 INTRODUCTION

Terracon Consultants, Inc. (Terracon) conducted an asbestos survey of the Knights Inn and Budget Inn located at I-55 and Highway 8 in Grenada, Mississippi. The survey was conducted on July 8, 2023, by Brad McKnight and in general accordance with your proposal dated June 6, 2023. The buildings components were surveyed and homogeneous areas of suspect ACM were visually identified and documented. Although reasonable effort was made to survey accessible suspect materials, additional suspect but unsampled materials could be located in walls, in voids or in other concealed areas. The building's exterior and roofs were included in the survey.

Suspect ACM samples were collected in general accordance with the sampling protocols outlined in United States Environmental Protection Agency (EPA) 40 Code of Federal Regulations (CFR) Part 763 Subpart E 763, known as the Asbestos Hazard Emergency Response Act (AHERA). Samples were delivered to an accredited laboratory for analysis by Polarized Light Microscopy (PLM).

1.1 Project Objective

We understand this asbestos survey was requested due to planned demolition of the two existing hotel buildings located on the site. EPA regulation 40 CFR part 61, Subpart M of the asbestos National Emission Standards for Hazardous Air Pollutants (NESHAP) and Mississippi Administration Code Title 11, Part 2, Chapter 1, Rule 1.8, prohibits the release of asbestos fibers to the atmosphere during renovation or demolition activities. The asbestos NESHAP and MDEQ requires that potentially regulated ACM (RACM) be identified, classified and quantified prior to planned disturbances or demolition activities.

1-2 Reliance

This report is for the exclusive use of Greater Grenada Partnership for the project being discussed. Reliance by any other party is prohibited without the written authorization of Greater Grenada Partnership and Terracon. Reliance on this report by Greater Grenada



Partnership and all authorized parties will be subject to the terms, conditions, and limitations stated in proposal. The limitations of liability defined in Terracon's Agreement for Services are the aggregate limit of Terracon's liability to Greater Grenada Partnership.

2.0 BUILDING DESCRIPTION

The survey was comprised of the two (2) existing buildings located in Grenada, Mississippi. The buildings included the following:

- The Knights Inn an approximately 12,350 square foot two-story building
- The Budget Inn an approximately 11,550 square foot two-story building

The two buildings were similar in construction with similar suspect materials that were sampled during the survey. The interior walls consisted of gypsum wallboard. The floors consisted of carpeting or vinyl floor tile. The ceilings were finished textured gypsum wallboard. The exterior walls consisted of brick or stucco. The roof of both buildings is metal.

3.0 ASBESTOS SURVEY

3.1 Field Activities

The survey was conducted by Brad McKnight, a State of Mississippi licensed asbestos inspector. A copy of the asbestos inspector's license is attached as Appendix E. The survey was conducted in general accordance with the sample collection protocols established in USEPA 40 CFR Part 763, Subpart E, Section 763.86, AHERA. A summary of survey activities is provided below.

3.1.1 Visual Assessment

Survey activities were initiated with visual observations of the interior of the spaces to identify homogeneous areas of suspect ACM. A homogeneous area (HA) consists of building materials that appear similar throughout in terms of color and texture with consideration given to the date of application. The assessment was conducted in visually accessible areas of the building proposed for demolition. Materials identified as glass, wood, metal or rubber were not considered suspect ACM.

3.1.2 Physical Assessment

A physical assessment of each HA of suspect ACM was conducted to assess the friability and condition of the materials. A friable material is defined by the USEPA as a material



which can be crumbled, pulverized or reduced to powder by hand pressure when dry. Friability was assessed by physically touching suspect materials.

3.1.3 Sample Collection

Based on results of the visual observation, bulk samples of suspect ACM were collected in general accordance with USEPA AHERA sampling protocols. Samples of suspect materials were collected from randomly selected locations in each homogeneous area. The inspectors collected bulk samples using wet methods as applicable to reduce the potential for fiber release. Samples were placed in sealable containers and labeled with unique sample numbers using an indelible marker.

The selection of sample locations and frequency of sampling were based on Terracon's observations and the assumption that like materials in the same area are homogeneous in content.

Terracon collected forty-eight (48) samples from twelve (12) homogeneous areas (HA) of suspect ACM. A summary of suspect ACM samples collected are included as Appendix A. Photos of homogeneous materials sampled are included in Appendix C. A sample location figure is presented in Appendix D.

3.1.4 Sample Analysis

Bulk samples were submitted under chain of custody to Quantem Laboratories (QL) of Oklahoma City, Oklahoma, for analysis by polarized light microscopy with dispersion staining techniques per USEPA methodology 600/R-93/116. The percentage of asbestos, where applicable, was determined by microscopic visual estimation. Quantem Laboratories is accredited under the National Voluntary Laboratory Accreditation Program (NVLAP) Accreditation No. 101959-0.

4.0 REGULATORY OVERVIEW

The State of Mississippi utilizes the Mississippi Department of Environmental Quality (MDEQ) to regulate and enforce asbestos-related activity within the state. MDEQ requires that all individual or company performing an asbestos-related activity be accredited or licensed by the State of Mississippi, through the MDEQ. MDEQ requires each owner or operator of a demolition or renovation activity to notify at least 10 working days before asbestos stripping or removal work or any other activity begins that would break up, dislodge, or similarly disturb asbestos material. An asbestos-related activity consists of the disturbance (whether intentional or unintentional) or abatement of ACM, the performance of asbestos surveys, the development of management plans, asbestos project design, monitoring for airborne asbestos.



The asbestos NESHAP (40 CFR Part 61, Subpart M) regulates asbestos fiber emissions and asbestos waste disposal practices. The asbestos NESHAP regulation also requires the identification and classification of existing ACM according to friability prior to demolition or renovation activity. Friable ACM is a material containing more than 1% asbestos that, when dry, can be crumbled, pulverized or reduced to powder by hand pressure. All friable ACM is considered regulated asbestos containing material (RACM).

The asbestos NESHAP regulation classifies ACM as either RACM, Category I non-friable ACM or Category II non-friable ACM. RACM includes all friable ACM, along with Category I and Category II non-friable ACM that has become friable, will be or has been subjected to sanding, grinding, cutting or abrading, or ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder in the course of renovation or demolition activity. Category I non-friable ACM are exclusively asbestos-containing packings, gaskets, resilient floor coverings, resilient floor covering mastics and asphalt roofing products that contain more than 1% asbestos. Category II non-friable ACM and all other non-friable materials other than Category I non-friable ACM that contain more than 1% asbestos. Category II non-friable ACM generally includes but is not limited to cementitious material such as: cement pipes, cement siding, cement panels, glazing, mortar and grouts.

The United States Occupational Safety and Health Administration (USOSHA) asbestos standard for construction (29 CFR 1926.1101) regulates workplace exposure to asbestos. The USOSHA standard requires that employee exposure to airborne asbestos must not exceed 0.1 fibers per cubic centimeter of air (0.1 f/cc) as an eight-hour time weighted average (TWA) and not exceed 1.0 fibers per cubic centimeter of air (1.0 f/cc) over a 30-minute time period known as an excursion limit (EL). The TWA and EL are known as USOSHA's asbestos permissible exposure limits (PELs). The USOSHA standard classifies construction and maintenance activities which could disturb ACM and specifies work practices and precautions which employers must follow when engaging in each class of regulated work.

5.0 FINDINGS

Based upon this survey, asbestos was detected in several of the suspect materials sampled and submitted for analysis. Laboratory analytical reports are included as Appendix B.

Laboratory analysis confirmed the following asbestos-containing materials:

- **Knights Inn**: The joint compound located within the gypsum wallboard system, the ceiling surface material, and the 12"x12" white floor tile with black mastic.
- Budget Inn: The ceiling surface material.



It should be noted that suspect materials, other than those identified during this survey may exist within the buildings. Should suspect materials other than those which were identified during this survey be uncovered during the demolition process, those materials should be assumed asbestos containing until sampling and analysis can confirm or deny their asbestos content.

The State of Mississippi utilizes the MDEQ to regulate and enforce asbestos-related activity within the state. The MDEQ requires that an inspection be conducted by a person currently accredited as an MDEQ asbestos inspector.

A "State of Mississippi Notification of Demolition/Renovation Form" is required to be submitted to the MDEQ 10 days prior to commencing demolition activities or any renovation activity, including asbestos abatement, affecting at least 160 square feet, 260 linear feet, or 35 cubic feet of regulated asbestos-containing material. The form should be completed and signed by authorized site personnel and submitted to the MDEQ 10 days prior to the implementation of proposed renovation or demolition activities at the site.

6.0 RECOMMENDATIONS

Terracon recommends that the confirmed ACM be removed by a Mississippi-licensed asbestos abatement contractor prior to disturbance of this material.

Contractors performing the proposed demolition work should be advised of the locations of materials containing asbestos and their responsibilities with respect to protection of employee exposures to asbestos found in the OSHA Asbestos standard for construction (29 CFR 1926.1101).

7.0 LIMITATIONS/GENERAL COMMENTS

Terracon did not perform sampling which required demolition or destructive activities such as knocking holes in walls, dismantling of equipment or removal of protective coverings. Reasonable efforts to access suspect materials within known areas of restricted access (e.g., crawl spaces) were made; however, confined spaces or areas which may pose a health or safety risk to Terracon personnel were not sampled. Sampling did not include suspect materials which could not be safely reached with available ladders/man-lifts.

This asbestos survey was conducted in a manner consistent with the level of care and skill ordinarily exercised by members of the profession currently practicing under similar conditions in the same locale. The results, findings, conclusions and recommendations expressed in this report are based on conditions observed during our survey of the buildings. The information contained in this report is relevant to the date on which this



survey was performed and should not be relied upon to represent conditions at a later

This report has been prepared on behalf of and exclusively for use by Greater Grenada Partnership for specific application to their project as discusses. This report is not a bidding document. Contractors or consultants reviewing this report must draw their own conclusions regarding further investigation or remediation deemed necessary. Terracon does not warrant the work of regulatory agencies, laboratories or other third parties supplying Information which may have been used in the preparation of this report. No warranty, express or implied, is made.

APPENDIX A ASBESTOS SURVEY SAMPLE SUMMARY

CONFIRMED ASBESTOS CONTAINING MATERIALS TERRACON PROJECT NO. EB237097 KNIGHT INN AND BUDGET INN CECIL SHELTON PROPERTIES GRENADA, MISSISSIPPI **TABLE 1,0**

KNIGHTS INN

Quantity	84,0000 SF	24,000 SF 2,500 SF	- Agreement	Knammy	23,000 SF
Lab Results	Texture: ND Adhesive: ND Joint Compound: 2% C Wallboard: ND Composite: <1% C	White Texture: ND Tan Texture: 2% C Tile: 2% C Mastic: 4% C	1 sh Dennite	Laborita	3% C
Condition	Good	Good		Sometime	Poog
NESHAP Category	Category II	Category II Category I	BUDGET INN	NESHAP Category	Category II
Material Location	Throughout Facility	Throughout Facility Maintenance Room/Laundry Are	Buba	Waterial Location	Throughout Facility
Material Description	Gypsum Wallboard/ Joint Compound/Tape	White/Tan Celling Surface Material 12" x 12" Floor Tile/Black Mastic		Material Description	Ceiling Surface Material
НА	03	6 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	THE STATE OF THE PARTY OF THE P	HA	90

*Quantities are estimates only and not to be used for bidding purposes SF: Square Feet C Chrysotlle Asbestos HA: Homogeneous Area ND: No Asbestos Detected

TABLE 2.0

ASBESTOS SURVEY SAMPLE SUMMARY

CEIL SHELTON PROPERTIES
KNIGHT INN AND BUDGET INN
GRENADA, MISSISSIPPI
TERRACON PROJECT NO. EB237097
KNIGHTS INN

НА	Material Description	Material Location	Condition	Sample Number	Lab Results
0.4	Exterior Brown/Gray			01-01	Asbestos Not Present
01	Stucco	Exterior Walls	Fair	01-02	Asbestos Not Present
				01-03	Asbestos Not Present
	Brown Carpet with			02-04	Asbestos Not Present
02	Adhesive	Throughout Interior	Fair	02-05	Asbestos Not Present
				02-06	Asbestos Not Present
				03-07	Texture: ND Adhesive: ND Joint Compound: 2% C Wallboard: ND Composite: <1% C
03	Gypsum Wallboard/Joint Compound/Tape	Throughout	Good	03-08	Texture: ND Adhesive: ND Joint Compound: 2% C Wallboard: ND Composite: <1% C
				03-09	Texture: ND Adhesive: ND Joint Compound: 2% C Wallboard: ND Composite: <1% C
				04-10	White Texture: ND Tan Texture: 2% C
				04-11	White Texture: ND Tan Texture: 2% C
				04-12	White Texture: ND
04	White/Tan Ceiling Surface Material	Throughout	Fair	04-13	White Texture: ND Tan Texture: 2% C
				04-14	White Texture: ND
				04-15	White Texture: ND
				04-16	White Texture: ND
				04-17	White Texture: ND
				04-18	White Texture: ND
05	Wallpaper with	Cuash Dantas		05-13	Asbestos Not Present
43	Adhesive	Guest Restrooms	Fair	05-14	Asbestos Not Present
				05-15	Asbestos Not Present

нА	Material Description	Material Location	Condition	Sample Number	Lab Results
				06-16	Tile, 2% C Mastic: 4% C
06	12" x 12" Floor Tile and Black Mastic	Maintenance Room/Laundry Area	Poor	06-17	Tile: 2% € Mastic: 4% €
				06-18	Tile: 2% C Masbc: 4% C

BUDGET INN

НА	Material Description	Material Location	Condition	Sample Number	Lab Results
				01-01	Asbestos Not Present
01	Tan Stucco	Exterior Walls	Fair	01-02	Asbestos Not Present
				01-03	Asbestos Not Present
				02-04	Asbestos Not Present
02	Green Carpet with	Throughout Building	Fair	02-05	Asbestos Not Present
	Adhesive			02-06	Asbestos Not Present
	Gypsum			03-07	Asbestos Not Present
03	Wallboard/Joint	Throughout Building	Poor	03-08	Asbestos Not Present
	Compound/Tape			03-09	Asbestos Not Present
				04-10	Asbestos Not Present
04	Wallpaper with Adhesive	Guest Restrooms	Fair	04-11	Asbestos Not Present
	Adriesive			04-12	Asbestos Not Present
				05-13	Asbestos Not Present
05	White Caulking	Guest Restrooms	Good	05-14	Asbestos Not Present
				05-15	Asbestos Not Present
				06-16	3% C
				06-17	3% C
				06-18	3% C
	America Morror Trade Trade Maria Co.			06-19	3% C
06	Ceiling Surface Material	Throughout Building	Fair	06-20	3% C
	Material			06-21	3% C
				06-22	3% C
				06-23	3% C
				06-24	3% C

C: Chrysotile Asbestos

HA: Homogeneous Area ND: No Asbestos Detected

APPENDIX B ASBESTOS LABORATORY ANALYTICAL REPORT



1.800.822.1650 2033 HERITAGE PARK DR. OKLAHOMA CITY, OK 73120

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/18/2023

Analyzed By: Methodology:

Benjamin Hill EPA/600/R-93/116

Project: Knights Inn ACM Survey - REVISED

Client: Terracon - Ridgeland

Brad McKnight

Project Location: Granada, MS

Project Number: EB237097

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)	Non Fibrous
007a		Layered	Тал Adhesive	Asbestos Not Present	NA	Glue
007Ь		Layered	Tan Joint Compound	Asbestos Present Chrysotile 2	NA	CaCO3
007c		Layered	White Wallboard	Asbestos Not Present	Cellulose le Glass Fiber	O Gypsum 2
007ძ		Composite	l an/White Joint Compound/Wallboard	Asbestos Present Chrysotile <1	-	O CaCO3 2 Gypsum
008	03-08	Layered	White Texture	Asbestos Not Present	NA	CaCO3
008a		Layered	Taπ Adhesive	Asbestos Not Present	NA	Glue

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis,

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0) This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA-40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods This report may not be used to claim product endorsement by NVLAP or any agency of the US Government This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR. OKLAHOMA CITY, OK 73120

1,800,822,5650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/18/2023

Analyzed By:

009c

Benjamin Hill

Layered

Client: Terracon - Ridgeland

Brad McKnight

Project: Knights Inn ACM Survey - REVISED

Project Location: Granada MS

Methodology:	Troject Execution. Granada, IVIS						
QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)		Non Fibrous
008Ь		Layered	Tan Joint Compound	Asbestos Present Chrysotile 2	NA		CaCO3
008c		Layered	White Wallboard	Asbestos Not Present	Cellulose Glass Fiber	10 2	Gypsum
008d		Composite	Tan/White Joint Compound/Wallboard	Asbestos Present Chrysotile <1	Cellulose Glass Fiber	10 2	CaCO3 Gypsum
009	03-09	Layered	White Texture	Asbestos Not Present	NA		CaCO3
009a		Layered	Tan Adhesive	Asbestos Not Present	NA		Glue
009ь		Layered	Tan Joint Compound	Asbestos Present Chrysotile 2	NA		CaCO3

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

Asbestos Not Present

White

Wallboard

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods.

This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory

Cellulose

Glass Fiber

10

Gypsum



2033 FIERITAGE PARK DR, OKLAHOMA CITY, OK 73120

1.800.822.1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

Client: Terracon - Ridgeland

Account Number:

C085

Brad McKnight

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

Analyzed By:

07/18/2023

Benjamin Hill

Client

EPA/600/R-93/116

Project: Knights Inn ACM Survey - REVISED

Project Location: Granada, MS

Project Number: EB237097

Methodology:

QuanTEM

Color /

Ashestos (%)

Non-Asbestos

Non Fibrous

Sample ID	Sample ID	Composition	Description	Asbestos (%)		Fiber (%)		Tion I broa.
009d		Composite	Tan/White Joint Compound/Wallboard	Asbestos Present Chrysotile	<1	Cellulose Glass Fiber	10 2	CaCO3 Gypsum
010	04-10	Layered	White Ceiling Texture	Asbestos Not Present	:	NA		CaCO3 Foam
010a		Layered	Tan Ceiling Texture	Asbestos Present Chrysotile	2	NA		CaCO3 Paint
011	04-11	Layered	White Ceiling Texture	Asbestos Not Present		NA		CaCO3 Foam
011a		Layered	Tan Ceiling Texture	Asbestos Present Chrysotile	2	NA		CaCO3 Paint
012	04-12	Нопюдепе оиѕ	White Ceiling Texture	Asbestos Not Present		NA		CaCO3 Foam

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0) This report relates only to the specific items tested NVLAP accreditation applies only to analysis performed utilizing EPA-40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR, O'LAHOMA CITY, OK 73120

1.800.822.1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/18/2023

Analyzed By:

Benjamin Hill

Methodology:

EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Knights Inn ACM Survey - REVISED

Project Location: Granada, MS

Project Number: EB237097

QuanTEM Client Color / Non-Asbestos Non Fibrous Sample ID Sample ID Composition Description Asbestos (%) Fiber (%) 013 04-13 Layered White Asbestos Not Present NA CaCO3 Ceiling Texture Foam 013a Layered Tan Asbestos Present NA CaCO3 Paint Ceiling Texture Chrysotile 2 014 04-14 Homogeneous White Asbestos Not Present NΛ CaCO3 Ceiling Texture Foam 015 04-15 Homogeneous White Asbestos Not Present NA CaCO3 Ceiling Texture Foam 016 04-16 Homogeneous White Asbestos Not Present NA CaCO3 Ceiling Texture Foam 017 04-17 Homogeneous White Asbestos Not Present NA CaCO3 Foam Ceiling Texture 018 04-18 Homogeneous White Asbestos Not Present NA CaCO3 Ceiling Texture Foam

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods. This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120

.800 822 650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed: Analyzed By:

07/18/2023

Methodology:

Benjamin Hill EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Knights Inn ACM Survey - REVISED

Project Location: Granada, MS

Project Number: EB237097

Non-Asbestos Non Fibrous QuanTEM Client Color / Fiber (%) Sample ID Sample ID Composition Description Asbestos (%) CaCO3 NA 019 05-19 Layered White Asbestos Not Present Surfacing Asbestos Not Present Cellulose Binder 019a Tan Layered Wall Paper Glue Asbestos Not Present NA 019bClear Layered Adhesive CaCO3 NA 020 05-20 White Asbestos Not Present Layered Surfacing Cellulose 95 Binder 020a Layered Tan Asbestos Not Present Wall Paper NA Glue 0206 Layered Clear Asbestos Not Present Adhesive

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120

1.800.822.1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

C085

Account Number: Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/18/2023

Analyzed By: Methodology: Benjamin Hill

EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Knights Inn ACM Survey - REVISED

Project Location: Granada, MS

Project Number: EB237097

			110jeet ivai	HIDEL. ED23/09/		
QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)	Non Fibrous
021	05-21	Layered	White Surfacing	Asbestos Not Present	NA	CaCO3
021a		Layered	Tan Wall Paper	Asbestos Not Present	Cellulose 95	Binder
021ь		Layered	Clear Adhesive	Asbestos Not Present	NA	Glue
022	06-22	Layered	White Floor Tile	Asbestos Present Chrysotile 2	NA	CaCO3 Vinyl
022a		Layered	Black Mastic	Asbestos Present Chrysotile 4	NA	Tar
023	06-23	Layered	White Floor Tile	Asbestos Present Chrysotile 2	NA	CaCO3 Vinyl
023a		Layered	Black Mastic	Asbestos Present Chrysotile 4	NA	Tar

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods
This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR, OKLAHOMA CITY, OK 73120

1.800.822.1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360273

C085

Account Number:

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed: Analyzed By:

07/18/2023

Benjamin Hill

Client: Terracon - Ridgeland

Brad McKnight

Project Location: Project Number: EB237097

Project: Knights Inn ACM Survey - REVISED

Granada, MS

Methodology: QuanTEM

EPA/600/R-93/116

Color /

Asbestos (%)

Non-Asbestos Fiber (%)

NA

Non Fibrous

Sample ID

Client Sample ID

Composition

Description

Chrysotile

024

06-24

Layered

White

Asbestos Present

NA

CaCO3 Vinyl

024a

Layered

Black Mastic

Floor Tile

Asbestos Present Chrysotile

4

2

Tar

REVISED

Benjamin Hill

Benjamin Hill, Assistant Laboratory Manager

8/3/2023

Date of Report



ASBESTOS CHAIN OF CUSTODY

Page 1 of 2

CAN IT	2035 Heritage Park Drive, Oktahoma City, OK / 3 20-7502 (800) 822-1650 • (405) 755-7272 • Fax: (405) 755-2058	705) 755-7272 • F	y, OK /3120-7502 ax: (405) 755-2058	For Lab Use Only
www.QuanTEM.com	LEGAL DOCUMENT - PLEASE PRINT LEGIBLY	ENT - PLEASE	PRINT LEGIBLY	Lab No. 360 213
Contact Information			Project Information	Report Results (2) one box)
Company. Terracon/Ridgeland	Phone: (769) 233-2	072 Project Name:	(769) 233-2072 Project Name: Knights Inn ACM Survey	QuanTEM Website
Contact: Brad McKnight	Cell Phone: (601) 497-5795	795 Project Location	Project Location: Grenada, MS	Email bracheright@urnen.com
Account#: CO-85	5-nail: brad.mcknight@terracon.com	n.com Project ID;	EB237097	Other
SAMPLED BY: Name Brad McKnight	Date 7/8/2023	P.O. Number	EB237097	
RELINQUISHED BY	DATE & TIME	VIA	RECEIVED BY	DATE & TIME
Seller	7/12/2023	Wrex	nay	01:6 21/21/2
T.	,			
	REQUESTED SERVICES (Please @ the Appropriate Boxes)	(Please ☑ the	ppropriate Boxes)	1)

	PLM		PLM		TEM		TEM	þ	TURN	TURNAROUND TIME
7	Bulk Analysis (EPA 600/R-93/116)	3/116)	Vermiculite Attic Insulation	notalas	Air-AHERA	Salk M	Bulk- Presence / Absence EPA600/R-93/116	PA600/R-93/116		Rush
	400 Paint Count] <u> </u> _	1 (EPA 600/K-04/004)		Air-NIOSH 7402	Bulk	Bulk- Quantitative [weight%]- Chatfield	%)- Charfield		Same Day
	1000 Point Count	<u> </u>			Air-ISO 10312	Dust	Dust- Presence / Absence		П	24 - Hour
	Gravimetric Preparation		PCM		Drinking Water- EPA 100.2	Dust	Dust-Quantirative [fibers/sq.cm]- ASTM DS755		2	3 - Day
	Particle ID		NIOSH 7400		Waste Water- EPA 600/4-83-043	Other	<u></u>			5 - Day
N N	Sample ID (10 Characters Max)	☑ To Be Analyzed	Color		Description	-5	Volume / Area (asapplicable)	Comments / Notes	/ Not	es
ı	01-01	2	Tan		Exterior Stucco					
7	01-02	2	Tan		Exterior Stucco					
m	01-03	7	Tan		Exterior Stucco					
4	02-04	2	Brown	0	Carpet w/Adhesive					
'n	02-05	7	Brown	O	Carpet w/Adhesive					
v	02-08	2	Brown	0	Carpet w/Adhesive					
7	03-07	7	White	Gypsum Wa	Gypsum Wallboard/Joint Compound/Tape	d/Tape				
80	03-08	2	White	Gypsum Wa	Gypsum Wallboard/Joint Compound/Tape	d/Tape				
Q	03-09	2	White	Gypsum Wa	Gypsum Wallboard/Joint Compound/Tape	d/Tape			1	
0,	04-10	2	White	Ceil	Ceiling Surface Material					

SATURDAY FEDEX SAMPLE DELIVERY - CALL TO SCHEDULE • Use this address for Saturday Delivery onlys: 4220 N. Santa Fe Ave., Oklahoma City, OK 73105-8517 • Mark Package "Hold for Saturday Pickup" Please Note - UPS and USPS are NOT available for Saturday Delivery



ASBESTOS CHAIN OF CUSTODY

2033 Heritage Park Drive, Oklahoma City, OK 73120-7502 (800) 822-1650 • (405) 755-7272 • Fax: (405) 755-2058

LEGAL DOCUMENT - PLEASE PRINT LEGIBLY

y	
7	
Page	

	73	teject
For Lab Use Only	3602	Accept Re
For I	Lab No.	Ů

Proje	Project Information					
Company:	Terracon/Ridgeland	idgeland		Project Name: Knights Inn ACM Survey	Project Location:	Project Location: Grenada, MS
ő	Sample ID (10 Characters Max)	☑ To Be Analyzed	Color	Description	Volume / Area (as applicable)	Comments / Notes
27	04-11	2	White	Ceiling Surface Material		
1,2	04-12	2	White	Ceiling Surface Material		
ű	04-13	Z	White	Ceiling Surface Material		
4.	04-14	2	White	Ceiling Surface Material		
15	04-15	D	White	Ceiling Surface Material		
10	04-16	2	White	Ceiling Surface Material		
1,	04-17	2	White	Ceiling Surface Material		
₩	04-18	2	White	Ceiling Surface Material		
61	05-19	7	Tan/Clear	Wallpaper w/Adhesive		
2	05-20	2	Tan/Clear	Wallpaper w/Adhesive		
21	05-21	2	Tan/Clear	Wallpaper w/Adhesive		
22	06-22		White	12" x 12" Floor Tile w/Mastic		
13	06-23		White	12" x 12" Floor Tile w/Mastic		
42	06-24		White	12" x 12" Floor Tile w/Mastic		
55						
76						
27						
78						
59						
6						
;						

SATURDAY FEDEX SAMPLE DELIVERY - CALL TO SCHEDULE • Use this address for Saturday Delivery only: 4220 N. Santa Fe Ave., Oklahoma City, OK 73105-8517 • Mark Package "Hold for Saturday Pickup" Please Note - UPS and USPS are NOT available for Saturday Delivery



2033 HERITADE PARK DR. OKLAHOMA CITY. OK 73120 1 800 822 1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271 Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/17/2023

Analyzed By: Methodology:

Benjamin Hill

EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Budget Inn ACM Survey

Project Location: Grenada, MS

Project Number: EB237097

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)	Non Fibrous
001	01-01	Layered	White Stucco	Asbestos Not Present	NA	CaCO3 Sand Paint
001a		Layered	Gray Stucco	Asbestos Not Present	NA	CaCO3 Sand
002	01-02	Layered	White Stucco	Asbestos Not Present	NA	CaCO3 Sand Paint
002a		Layered	Gray Stucco	Asbestos Not Present	NA	CaCO3 Sand
003	01-03	Layered	White Stucco	Asbestos Not Present	NA	CaCO3 Sand Paint
003a		Layered	Gray Stucco	Asbestos Not Present	NA	CaCO3 Sand

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods.

This report may not be used to claim product endorsement by NVLAP or any agency of the US Government This report may not be reproduced except in full, without the written approval of the laboratory



2033 Hermage Park Dr., Oklahoma City, OK 73120 1 800 822 1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/17/2023

Analyzed By: Methodology: Benjamin Hill

EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Budget Inn ACM Survey

Project Location: Grenada, MS

Project Number: EB237097

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)		Non Fibrous
004	02-04	Layered	Green Carpet	Asbestos Not Present	Synthetic	90	Binder
004a		Layered	Cream Adhesíve	Asbestos Not Present	NA		CaCO3 Glue
005	02-05	Layered	Green Carpet	Asbestos Not Present	Synthetic	90	Binder
005a		Layered	Cream Adhesive	Asbestos Not Present	NA		CaCO3 Glue
006	02-06	Layered	Green Carpet	Asbestos Not Present	Synthetic	90	Binder
006a		Layered	Cream Adhesive	Asbestos Not Present	NA		CaCO3 Glue
007	03-07	Homogeneous	White Wallboard	Asbestos Not Present	Cellulose	15	Gypsum

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA-40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR. OKLAHOMA CITY, OK 73120

1-800-822 1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/17/2023

Analyzed By: Methodology: Benjamin Hill

EPA/600/R-93/116

Client: Terracon - Ridgeland Brad McKnight

Project: Budget Inn ACM Survey

Project Location: Grenada, MS

Project Number: EB237097

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)		Non Fibrous
008	03-08	Homogeneous	White Wallboard	Asbestos Not Present	Cellulose	15	Gypsum
009	03-09	Homogeneous	White Wallboard	Asbestos Not Present	Cellulose	15	Gypsum
010	04-10	Layered	Tan Wall Paper	Asbestos Not Present	Synthetic	35	Vinyl
010a		Layered	Tan/Clear Adhesive	Asbestos Not Present	NA		Glue
011	04-11	Layered	Tan Wall Paper	Asbestos Not Present	Synthetic	35	Vinyl
011a		Layered	Tan/Clear Adhesive	Asbestos Not Present	NA		Glue

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods. This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERMAGE PARK DR. OKLAHOMA CITY, OK 73-20 1.800.822 1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271

Account Number:

C085

07/13/2023

Date Received: Received By: Date Analyzed:

Baylie Longstreth

07/17/2023

Analyzed By: Methodology: Benjamin Hill EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Budget Inn ACM Survey

Project Location: Grenada, MS

Project Number: EB237097

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)	Non-Asbestos Fiber (%)	Non Fibrous
012	04-12	Layered	Tan Wall Paper	Asbestos Not Present	Synthetic 35	Vinyl
012a		Layered	Tan/Clear Adhesive	Asbestos Not Present	NA	Glue
013	05-13	Homogeneous	White Caulk	Asbestos Not Present	NA	CaCO3 Binder
014	05-14	Homogeneous	White Caulk	Asbestos Not Present	NA	CaCO3 Binder
015	05-15	Homogeneous	White Caulk	Asbestos Not Present	NA	CaCO3 Binder
016	04-16	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	NA 3	CaCO3 Mica Paint
017	04-17	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	NA 3	CaCO3 Mica Paint

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA—40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods.

This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory.



Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271

Account Number:

C085

Date Received:

07/13/2023

Received By:

Baylie Longstreth

Date Analyzed:

07/17/2023

Analyzed By:

Benjamin Hill

Methodology:

Project: Budget Inn ACM Survey

Client: Terracon - Ridgeland

Brad McKnight

Project Location: Grenada, MS

Project Number: EB237097

EPA/600/R-93/116

QuanTEM Sample ID	Client Sample ID	Composition	Color / Description	Asbestos (%)		Non-Asbestos Fiber (%)	Non Fibrous
018	04-18	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CaCO3 Mica Paint
019	05-19	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CaCO3 Mica Paint
020	05-20	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CaCO3 Mica Paint
021	05-21	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CaCO3 Mica Paint
022	06-22	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CuCO3 Mica Paint
023	06-23	Homogeneous	White Ceiling Texture	Asbestos Present Chrysotile	3	NA	CaCO3 Mica Paint

Unless otherwise noted, upon receipt the condition of the sample was acceptable for analysis.

QuanTEM is a NVLAP accredited Testing PLM laboratory (Lab Code: 101959-0). This report relates only to the specific items tested. NVLAP accreditation applies only to analysis performed utilizing EPA-40 CFR Appendix E to Subpart E of Part 763 and EPA/600/R-93/116 methods This report may not be used to claim product endorsement by NVLAP or any agency of the US Government. This report may not be reproduced except in full, without the written approval of the laboratory



2033 HERITAGE PARK DR. OKLAHOMA CITY, OK 73120

1,800 822 1650

Polarized Light Microscopy Asbestos Analysis Report

QuanTEM Lab No. 360271 Account Number:

C085

Date Received:

07/13/2023

Received By: Date Analyzed: Baylie Longstreth

07/17/2023

Analyzed By: Methodology: Benjamin Hill

EPA/600/R-93/116

Client: Terracon - Ridgeland

Brad McKnight

Project: Budget Inn ACM Survey

Project Location: Grenada, MS

Project Number: EB237097

QuanTEM Sample ID

Client

Color /

Non-Asbestos

Non Fibrous

Sample ID

Composition

Description

Asbestos (%)

Fiber (%)

NA

024

06-24

Homogeneous

White Ceiling Texture Asbestos Present Chrysotile

3

CaCO3 Mica **Paint**

Benjamin Hill

Benjamin Hill, Assistant Laboratory Manager

7/18/2023

Date of Report



ASBESTOS CHAIN OF CUSTODY

Page 1 of 2

For Lab Use Only

Lab No.

2033 Heritage Park Drive, Oklahoma City, OK 73120-7502 (800) 822-1650 • (405) 755-7272 • Fax: (405) 755-2058

>
- 20
Ū
Щ
2
=
۵,
LLI
PLEASI
Щ
٦
- 1
Σ
5
×
ă
_
A
GA
ŭ

ĺ		Contact Information	ation			Pr	Project Information	Repo	Report Besults (V) one box)
Сощ	Company: Terracon/Ridgeland	and	Phone: ((769) 233-2072	Project Name:	Budg	Budget Inn ACM Survey	Ē	QuanTEM Website
Contact:	Brad McKnight		Cell Phone: (6	Cell Phone: (601) 497-5795	_	Gren	Project Location: Grenada, MS		Email and metanghallerracon com
Accou	Account #: CO-85		E-mail: brad.m	E-mail: brad.mcknight@lerracon com	-	EB23	EB237097		Other
SAM	SAMPLED BY: Name: Brad McKnight	ıight	Oate: 7/8/	7/8/2023	P.O. Number:	EB23	EB237097		
	RELINQUISHED BY) BY	DATE & TIME	TIME	VIA		RECEIVED BY		DATE & TIME
	man (S)		2/12/2023		FUNEX	0	22		7/13/23 9:10
			REQUESTE	REQUESTED SERVICES (Please 🗵 the Appropriate Boxes)	ease 🗵 the A	propri	ate Boxes)		
	PLM	۵.	PLM	TEM	Σ		TEM		TURNAROUND TIME
2	Bulk Analysis (EPA 600/R-93/116)	Vermiculite	Vermiculite Attic Insulation	Air- AHERA			Bulk- Presence / Absence EPA600/R-93/116	116	Rush
	400 Point Count	CEPA 600/R-04/004)	04/004)	Air- NIOSH 7402	02		Bulk- Quantitative [weight%]- Chatfield		Same Day
	1000 Point Count			Air- ISO 10312			Dust- Presence / Absence		24 - Hour
	Gravimetric Preparation	А	PCM	Drinking Water- EPA 100.2	r- EPA 100.2		Dust- Quantitative [fibers/sq.cm]- ASTM DS755		3-Day
	Particle ID	NIOSH 7400		Waste Water- E	Waste Water- EPA 600/4-83-043		Other		5 - Day
N N	Sample ID	Be Color zed		Description	ption		Volume / Area (as applicable)	Comments / Notes	/ Notes
	01-01	Tan		Exterior Stucco	Stucco				•
	01-02	Tan		Exterior Stucco	Stucco				
	01-03	Tan		Exterior Stucco	Stucco				
	02-04	Green	C	Carpet w/Adhesive	Adhesive				
	02-05	Green	Ç.	Carpet w/Adhesive	Adhesive				

🔹 Use rins address for saturday Delivery only 19220 N. santa be ave. Oklahomic Erty, IP 23:954857 🙃 Mark Package. Hord for Saturday Proxiti TUPDEY FEDEX SAMPLE DELIVERY

Gypsum Wallboard/Joint Compound/Tape Gypsum Wallboard/Joint Compound/Tape

Carpet w/Adhesive

White White White

Green

22

02-06

03-07

Gypsum Wallboard/Joint Compound/Tape Wallpaper w/Adhesive

- 12× over115Pv see NOT contribile for Samuday

Tan/Clear

04-10

222

03-09

03-08



ASBESTOS CHAIN OF CUSTODY

2033 Heritage Park Drive, Oklahoma City, OK 73120-7502 (800) 822-1650 • (405) 755-7272 • Fax: (405) 755-2058

LEGAL DOCUMENT - PLEASE PRINT LEGIBLY

Page 2 of __2_ For Lab Use Only

Lab No. Accept Reject

Proje	Project Information			Y		
Company	Terracon/Ridgeland	dgeland		Project Name: Budget Inn ACM Survey	Project Location: G	Grenada, MS
o N	Sample ID (10 Characters Max)	전 To Be Analyzed	Color	Description	Volume / Area (as applicable)	Comments / Notes
	04-11	2	Tan/Clear	Wallpaper w/Adhesive		
2	04-12	2	Tan/Clear	Wallpaper w/Adhesive		
	05-13	Z	White	Restroom Caulking		
7	05-14	2	White	Restroom Caulking		
-	05-15	2	White	Restroom Caulking		
-	06-16	2	White	Ceiling Surface Material		
2	06-17	2	White	Ceiling Surface Material		
- V	06-18	2	White	Ceiling Surface Material		
	05-19	2	White	Ceiling Surface Material		
	06-20	2	White	Ceiling Surface Material		-
3	06-21	2	White	Ceiling Surface Material		
1	06-22	2	White	Ceiling Surface Material		
Š	06-23		White	Ceiling Surface Material		
7	06-24	Z	White	Ceiling Surface Material	11 11 11 11 11 11 11 11 11 11 11 11 11	
:1	*					
1						
3						
			7			
5, 8][
]		The same of the sa		

A FLITHOAY FEDEX SAMPLE DELIVERY CALL TO SCHEDULE. • Use this address for Saturday Delivery ordy. 4220 N. Santa Fe Ave., Oklahoma City, OK 73105-8577. • Mark Package. Hold for Saturday Pickup Please Note. UPS and USPS are NOT available for Saturday Delivery

APPENDIX C PHOTOGRAPHS OF HOMOGENEOUS AREAS

August 7, 2023 | Terracon Project No. EB237097 Cecil Shelton Properties | Grenada, M ssissippi Asbestos Survey Report



Photo 1: Knights Inn Exterior Stucco (HA-01)



Photo 3: Knights Inn Gypsum Wallboard System (HA-03)





Photo 2: Knights Inn Brown Carpet (HA-02)



Photo 4: Knights Inn Ceiling Surface Material (HA-04)



Photo 5: Knights Inn Wallpaper with Adhesive (HA-05)



Photo 7: Budget Inn Exterior Stucco (HA-01)





Photo 6: Knights Inn 12" x 12" Floor Tile with Mastic (HA-06)



Photo 8: Budget Inn Green Carpet (HA-02)

Asbestos Survey Report Cecil Shelton Properties | Grenada, Mississippi August 7, 2023 | Terracon Project No. EB237097



Photo 9: Budget Inn Gypsum Wallboard System (HA-03)



Photo 11: Budget Inn Restroom Caulking (HA-05)



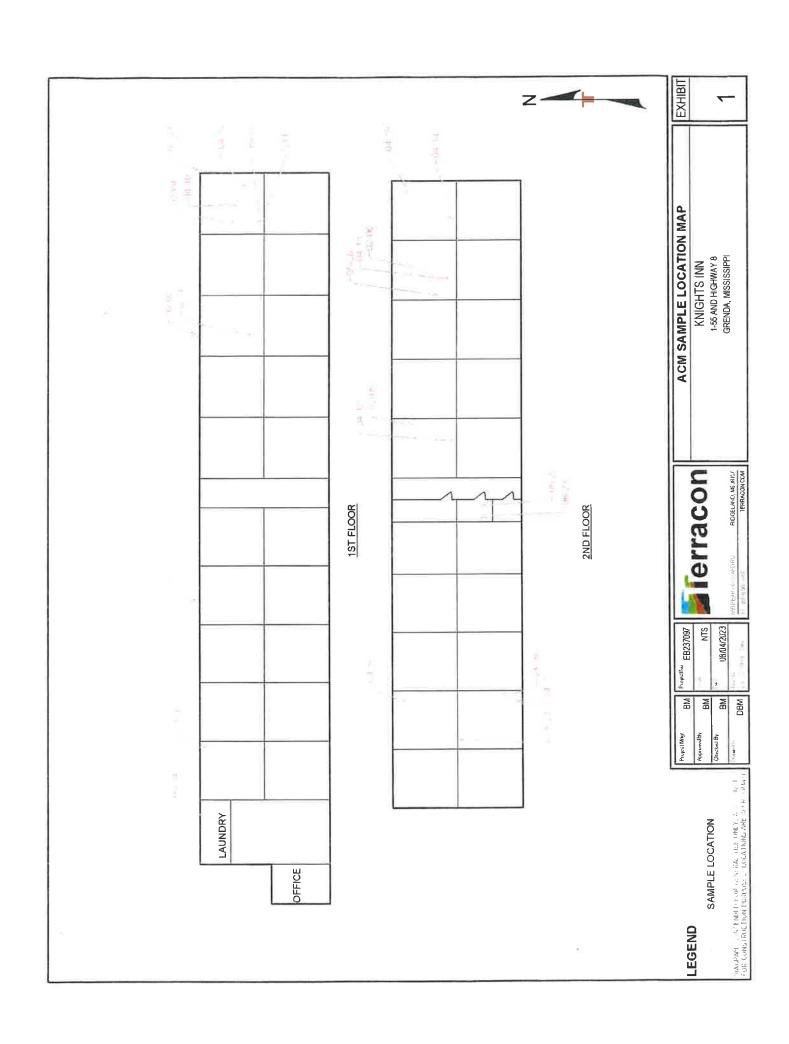



Photo 10: Budget Inn Wallpaper with Adhesive (HA-04)



Photo 12: Budget Inn Ceiling Surface Material (HA-06)

APPENDIX D SAMPE LOCATION DRAWING



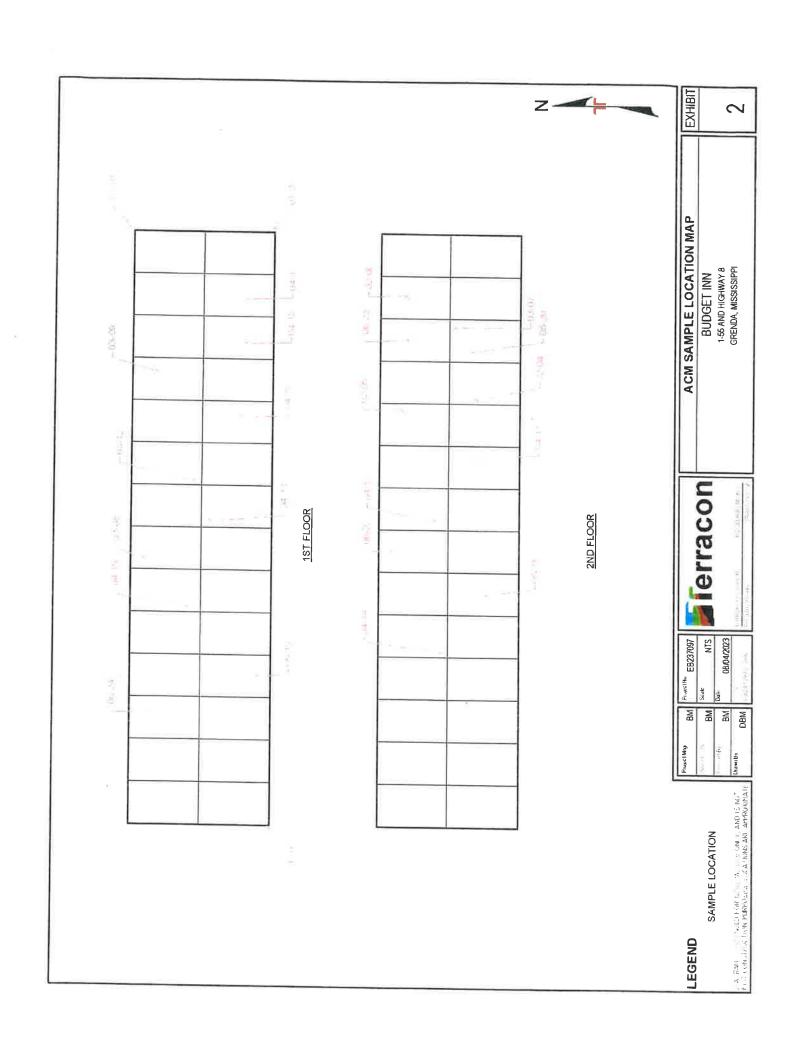

APPENDIX E CERTIFICATIONS

State of Mississippi

Department of Environmental Quality

Office of Pollution Control

Certificate of Licensure

In accordance with the Asbestos Abatement Accreditation and Certification Act.

Enacted as 1989 Mississippi Law, Chapter 505

Be it known that

Brad McKnight

Having submitted acceptable evidence of qualifications and training and other appropriate information, is hereby granted this

Asbestos Inspector

Certification

Chief, Asbestos & Lead Branch

I Ing Mallen

Certificate No.: ABI-00001685 Expiration Date: Jun 7th, 2024 Training Expires on Jun 7th, 2024