

AI:81954

MSR32 2984

(NUMBER TO BE ASSIGNED BY STATE)

APPLICANT IS THE: OWNER OPERATOR

OWNER CONTACT INFORMATION

OWNER CONTACT PERSON: Steve Milling
OWNER COMPANY LEGAL NAME: _____
OWNER STREET OR P. O. BOX: 512 Erin Lucern Road
OWNER CITY: Union STATE: MS ZIP: 39365
OWNER PHONE #: (601) 416-5080 OWNER EMAIL: rdymix@icloud.com

OPERATOR CONTACT INFORMATION

OPERATOR CONTACT PERSON: Steve Milling Ready Mix, Inc.
OPERATOR COMPANY LEGAL NAME: _____
OPERATOR STREET OR P. O. BOX: 512 Erin Lucern Road
OPERATOR CITY: Union STATE: MS ZIP: 39365
OPERATOR PHONE #: (601) 416-5080 OPERATOR EMAIL: rdymix@icloud.com

MINE INFORMATION

MINE NAME: Milling Mine
MINE SITE ADDRESS (If the physical address is not available, please indicate nearest named road.)
Street: Hwy 489
City: Union State: MS County: Newton Zip: 39365
SE _____ /4 OF SW _____ /4 OF SECTION 14, TOWNSHIP 8 N, RANGE 11 E
MINE SITE TRIBAL LAND ID (N/A If not applicable): N/A
ATTACH A USGS QUAD MAP, EXTENDING 1/2 MILE BEYOND FACILITY, OUTLINING THE MINE BOUNDARIES
(Maps can be obtained from the Mississippi Office of Geology. For information call 601-961-5523).
LATITUDE: 32 degrees 31 minutes 57 seconds LONGITUDE: 89 degrees 08 minutes 48 seconds
LAT & LONG DATA SOURCE (GPS (Please GPS Entrance Gate) or Map Interpolation): Map Interpolation
TOTAL ACREAGE: 4 MATERIAL TO BE MINED: CL & SC
WILL HYDRAULIC DREDGING BE USED? YES NO
WASHING OF SAND/GRAVEL? YES NO

m

ESTIMATED START DATE: 2022-07-01

ESTIMATED END DATE: 2025-12-01

YYYY-MM-DD

YYYY-MM-DD

SIC CODE 1442

NAICS CODE 212321

RECEIVING STREAM INFORMATION

NEAREST NAMED RECEIVING STREAM: Unnamed Tributary of Roebuck Branch

IS RECEIVING STREAM ON MISSISSIPPI'S 303(D) LIST OF IMPAIRED WATER YES NO

BODIES? (The 303(d) list of impaired waters and TMDL stream segments may be found on MDEQ's website:

http://www.deq.state.ms.us/MDEQ.nsf/page/TWB_Total_Maximum_Daily_Load_Section)

HAS A TMDL BEEN ESTABLISHED FOR THE RECEIVING STREAM SEGMENT? YES NO

COMPLETE IF STORM WATER DISCHARGE IS PROPOSED

ATTACH A STORM WATER POLLUTION PREVENTION PLAN (SEE PERMIT FOR REQUIREMENTS)

IDENTIFY THE ASSOCIATION OR GENERIC SWPPP ON FILE AT MDEQ: See Attached

COMPLETE IF WASTEWATER RECIRCULATION SYSTEM WITH NO DISCHARGE IS PROPOSED

DISTANCE BETWEEN RECIRCULATION POND(S) AND PROPERTY LINE: _____ (FT)
(MUST BE AT LEAST 150 FEET)

NUMBER OF RECIRCULATION POND(S): _____

STORAGE CAPACITY OF EACH RECIRCULATION POND(S): _____ (FT³)

COMPLETE IF MINE DEWATERING IS PROPOSED

ESTIMATED DEWATERING VOLUME: _____ (GAL/DAY)

NAME AND ADDRESS OF THE RECIPIENT OF THE DISCHARGE MONITORING REPORTS (DMRs), IF DIFFERENT FROM SIGNATORY: _____



MISSISSIPPI DEPARTMENT OF ENVIRONMENTAL QUALITY

RECEIVED
JUL 01 2022
Dept. of Environmental Quality

**MINING NOTICE OF INTENT (MNOI)
FOR COVERAGE UNDER
MINING STORM WATER, DEWATERING AND NO DISCHARGE
GENERAL PERMIT MSR32 _____
(Number to be assigned by State)**

File at least 30 days prior to the commencement of mining; 15 days if a Storm Water Pollution Prevention Plan (SWPPP) is already on file and mine dewatering is not proposed. Lateral expansion of an existing mine that has general permit coverage requires the submittal of the Major Modification Form, not a new MNOI. However, modification of the existing SWPPP to include the expansion is required. Discharge of storm water or impounded water associated with mining or the operation of a wastewater recirculation system with no discharge without written notification of coverage from MDEQ is a violation of State Law.

If the company seeking coverage is a corporation, a limited liability company, a partnership, or a business trust, attach proof of its registration with the Mississippi Secretary of State and/or its Certificate of Good Standing. This registration or Certificate of Good Standing must be dated within twelve (12) months of the date of the submittal of this coverage form. Coverage will be issued in the company name as it is registered with the Mississippi Secretary of State.

Please indicate the activities to be covered by this MNOI (check all that apply).

- Storm Water Discharges Associated with Mining
- Mine Dewatering
- Wastewater Recirculation System with No Discharge

The appropriate section of the MNOI must be completed if the applicant proposes to discharge storm water, discharge impounded mine water (dewatering) and/or operate a wastewater recirculation system with no discharge.

A site-specific Storm Water Pollution Prevention Plan (SWPPP) developed in accordance with ACT5 of the General Permit and a United States Geological Survey (USGS) quadrangle map or photocopy, indicating the site location and outfalls must be included with the MNOI submittal. The name of the quadrangle map must be shown on all copies. Quadrangle maps can be obtained from the MDEQ, Office of Geology at 601-961-5523. Additional submittals may include the following (check all that apply).

- Section 404 Documentation
- Notice of Exempt Operations Form
- Dam/Reservoir Safety Permit or Written Authorization

ALL INFORMATION MUST BE COMPLETED (indicate "N/A" where not applicable)

DOCUMENTATION OF COMPLIANCE WITH OTHER REGULATIONS/REQUIREMENTS
 Coverage under this general permit will not be granted until all other required MDEQ permits and approvals are addressed.

WILL THE CONSTRUCTION OR OPERATION OF THIS MINE INVOLVE THE RE-ROUTING, FILLING OR CROSSING OF A WATER CONVEYANCE OF ANY KIND? YES NO

If yes, contact the U.S. Army Corps of Engineers' Regulatory Branch for permitting requirements. If the mine requires a Corps of Engineers Section 404 permit, provide appropriate documentation with this MNOI that:

- The mine has been approved by individual permit, or
- The work will be covered by a nationwide permit and NO NOTIFICATION to the Corps is required, or
- The work will be covered by a nationwide or general permit and NOTIFICATION to the Corps is required.

LIST ANY NPDES PERMIT NO(S) _____ GEOLOGY APPLICATION/PERMIT NO. _____

LIST OTHER GEOLOGY PERMIT NUMBERS THAT APPLY TO COVERAGE AREA _____

IS THE MINE LESS THAN 4 ACRES AND GREATER THAN 1320 FEET FROM ANOTHER MINE? _____

YES A "Notice of Exempt Operations" Form must be included with the MNOI or proof of prior submission, if previously submitted to the Office of Geology.

NO A "Notice of Intent to Mine Class I or Class II Materials" Form must be filed before coverage will be granted under the Mining General Permit. For information on Office of Geology requirements, call 601-961-5515.

LIST ANY LOCAL STORM WATER ORDINANCES WITH WHICH THE OPERATIONS MUST COMPLY AND SUBMIT ANY

ASSOCIATED APPROVAL DOCUMENTATION. _____

IF IMPOUNDMENTS WILL BE CONSTRUCTED ABOVE NATURAL SURFACE ELEVATIONS, INDICATE WHICH, IF ANY, OF THE FOLLOWING APPLY.

- The impoundment will be constructed with a peripheral dam or levee 8 feet or greater in height, measured from the lowest elevation of its toe.
- The impoundment will have a maximum storage volume greater than 25 acre-feet.
- The impoundment will impound a watercourse with a continuous flow.
- The impoundment has the potential to threaten downstream lives or man-made structures.

If any of the impoundments meet any of the above criteria, the applicant will be required to obtain written authorization from MDEQ, Dam Safety Division before coverage will be granted under the Mining General Permit.

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

Authorized Signature: [Signature] Date: 6/24/22
 Printed Name: Steve Milling Title: Land Owner

This application shall be signed according to the General Permit, Act 15, T-4 as follows:

- For a corporation, by a responsible corporate officer.
- For a partnership, by a general partner.
- For a sole proprietorship, by the proprietor.
- For a municipal, state or other public facility, by either a principal executive officer, the mayor, or ranking elected official.
- Duly Authorized Representative

Please submit this form to:

Chief, Environmental Permits Division
 MDEQ, Office of Pollution Control
 P.O. Box 2261
 Jackson, Mississippi 39225

**Storm Water Pollution Prevention Plan
for**

Non-Coal Surface Mining Operations

by

Steve Milling Ready Mix, Inc.

512 Erin Lucern Road

Union, MS 39365

for

Milling Mine

Hwy 4987

Union, MS

June 2022

TABLE OF CONTENTS

Introduction..... 3

Site Description..... 3

General Requirements..... 4

Best Management Practices..... 5

Implementation Sequence..... 5

Post Construction Storm Water Management Measures..... 5

Housekeeping Practices..... 6

Implementation / Inspection..... 6

Certification..... 7

Quad Map..... 8

Mine Layout..... 9

BMP Details..... 10-14

INTRODUCTION

This document is the Storm Water Pollution Prevention Plan (SWPPP) for Non-Coal Surface Mining Operations by Steve Milling Ready Mix, Inc. This plan is the criteria for compliance with the regulations set forth by the Environmental Protection Agency, National Pollutant Discharge Elimination System (NPDES) permit application regulations for storm water discharges regarding construction storm water.

The purpose of this SWPPP is the control and mitigation of pollution in storm water discharges associated with the non-coal surface mining operations.

SITE DESCRIPTION

This project consists of excavation necessary to create a non-coal surface mine. Proposed activities will include land clearing, topsoil stripping and storage, excavation, and finally, reclamation. Access to the mining area will be from Highway 498. Upon completion of excavation activities, the disturbed areas will be permanently vegetated.

Excavation will disturb approximately 4 acres located in the Southeast $\frac{1}{4}$ of the Southwest $\frac{1}{4}$ of Section 14, Township 8 North, Range 11 East, Newton County, Mississippi. The topography of the site is gently sloping throughout. Currently, surface runoff generally drains southly toward an unnamed tributary of Roebuck Branch. From visuals from the site, the majority of the existing soils appear to classify as a CL or SC material according to the Unified Soil Classification System.

The majority of the project site described above is currently agricultural pasture land currently. Storm water from this proposed site drains into an unnamed tributary of Double Reed Brake Branch. **Double Reed Brake Branch is not listed on the 303(d) list for impairment as prescribed by MDEQ. Therefore, additional erosion and sediment controls that are warranted for sites discharging into listed receiving streams are not be required.**

Mine boundaries are at least 50 feet from the closest perennial stream. Boundary markers will be set to ensure the proper buffer area is maintained.

Planned reclamation of this site is to slope all walls to a maximum 3:1 slope. All disturbed areas will be re-vegetated.

GENERAL REQUIREMENTS

This Storm Water Pollution Prevention Plan consists of various controls appropriate for this particular site. The purposes of these various controls shall:

- Divert upslope water around disturbed areas of the site.
- Limit the exposure of disturbed areas to the shortest time as practical.
- Minimize the amount of surface area that must be disturbed.
- Implement Best Management Practices to mitigate adverse impacts from storm water runoff.
- Remove sediment from storm water before it leaves the site using appropriate methods.

Erosion and sediment controls consisting of vegetative and structural practices shall be designed to preserve vegetation or timely revegetated, disturbed areas; divert flow from exposed soils; store flows or otherwise limit runoff from exposed areas.

Post mining measures shall include on-site infiltration, flow attenuation in vegetated swales and natural depressions. After mining is complete the area void of ground cover shall be re-vegetated. After re-vegetation is complete, temporary erosion control measures shall be removed. Velocity dissipation may be required at the outfall of swales and drainage structures to provide non-erosive flows.

BEST MANAGEMENT PRACTICES

The implementation of these practices shall begin immediately upon coverage and will be maintained through the life of this project. The controls of importance include but are not limited to:

- Installation of construction entrance/exit.
- Installation of silt fencing.
- Installation of diversion berms along upslope perimeter of mine area to divert upstream run-off around disturbed areas.
- Permanent re-vegetation shall occur after construction to prevent erosion.

Mine operator shall implement controls to prevent erosion and adverse impacts on nearby streams and/or ponds. When work is not being performed in a disturbed area, appropriate temporary and/or vegetative and structural practices shall be initiated within seven calendar days.

If a sediment basin becomes necessary, then it will provide at least 3600 cubic feet (133 cubic yards) of storage per acre.

There are no known or anticipated non-storm water discharges associated with this mining activity.

IMPLEMENTATION SEQUENCE

The implementation sequence is as follows:

- Construct the construction entrance/exit.
- Install silt fencing.
- Construct upslope diversion berms to divert flows from mining site.
- Perform excavation and re-vegetate.

POST CONSTRUCTION/STORM WATER MANAGEMENT MEASURES

- Plate slopes with stockpiled topsoil and re-vegetate.
- Remove silt fencing after satisfactory vegetation cover is in place.

HOUSEKEEPING PRACTICES

The operator shall designate an area adjacent to the mine entrance for all equipment maintenance and repair. Runoff from this area will be directed away from natural drains and preparation will be made to remove any contaminants prior to release from subject property. Waste receptacles will be positioned as needed throughout site and be serviced on regular intervals. All chemicals, solvents, fertilizers and other potentially toxic materials will be stored in enclosed storage units or off site.

IMPLEMENTATION/INSPECTION

The owner/operator of this site shall implement controls as noted above to prevent erosion and adverse impacts on the nearby creek. When work is not being performed in a disturbed area, appropriate temporary and/or vegetative and structural practices shall be initiated within seven calendar days.


Inspections of all receiving streams (if feasible), outfalls, erosion and sediment controls, and other SWPPP requirements upon receipt of coverage and throughout permit coverage at least monthly, within 24 hours after commencement of a rainfall event equal to or greater than a 2-year, 24-hour storm event (approximately 6-inches on the Gulf Coast to 4 inches at the Mississippi-Tennessee State Line), and as necessary to ensure that erosion controls have been constructed, maintained, and function adequately to satisfy the requirements of this permit and to ensure that pollutants are not leaving the site.

These inspections should be reported in compliance with this permit. All records resulting from activities required shall be retained for a period of at least three years from the date of the inspection or report.


Within 30 days of final stabilization, a complete Request for Termination (RFT) of Coverage form shall be submitted to the Permit Board.

CERTIFICATION

I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure the qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

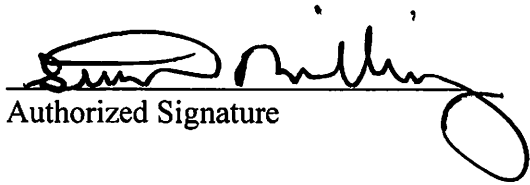
Authorized Signature

Date

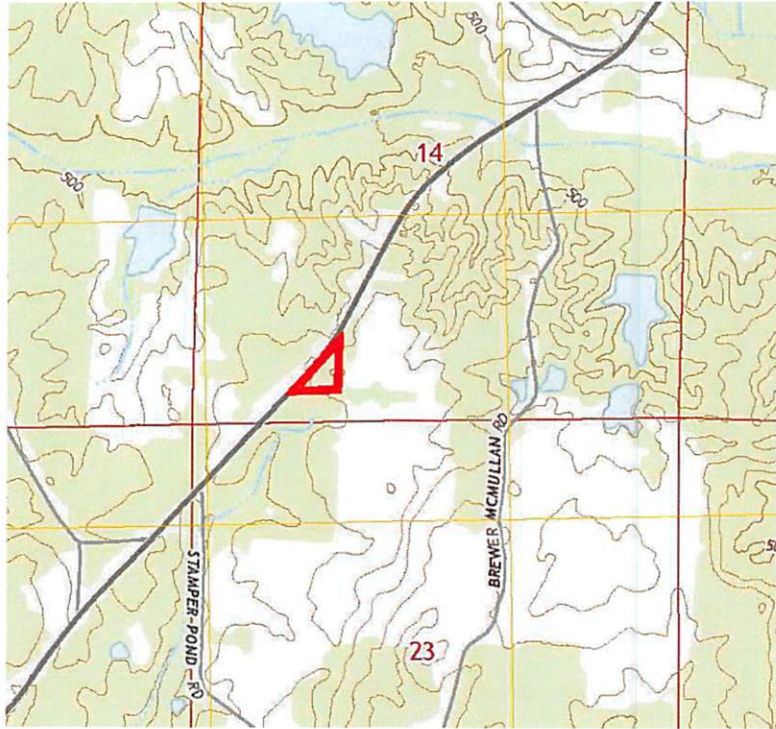

Milling Mine is located in Part of
SE ¼ of the SW ¼, Section 14,
Township 8 North, Range 11 East,
Lauderdale County, MS and
contains 4.0 acres more or less.

Entrance is located at:
32d 31' 57" N 89d 08' 48" W



Milling Mine
Topographic Mapping

for
Steve Milling




Topsoil to be stripped and stockpiled along perimeter of pit area. Upstream storm water runoff to be diverted around pit area through use of topsoil berm. Storm water runoff within pit area to be collected in silt fence prior to exiting mine footprint.




Milling Mine
Mine Layout


for
Steve Milling

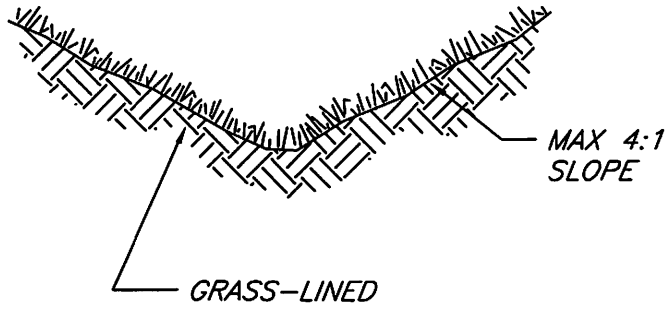

**TYPICAL V-SHAPED CHANNEL
CROSS-SECTION**

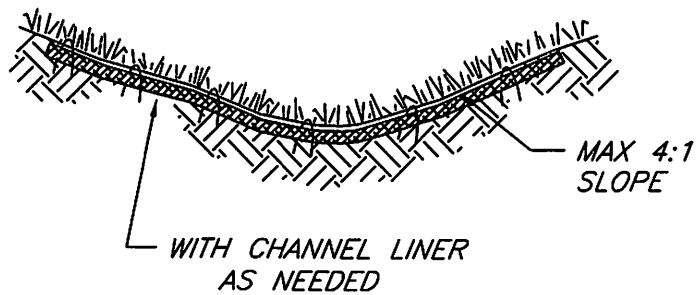

**TYPICAL PARABOLIC CHANNEL
CROSS-SECTION**

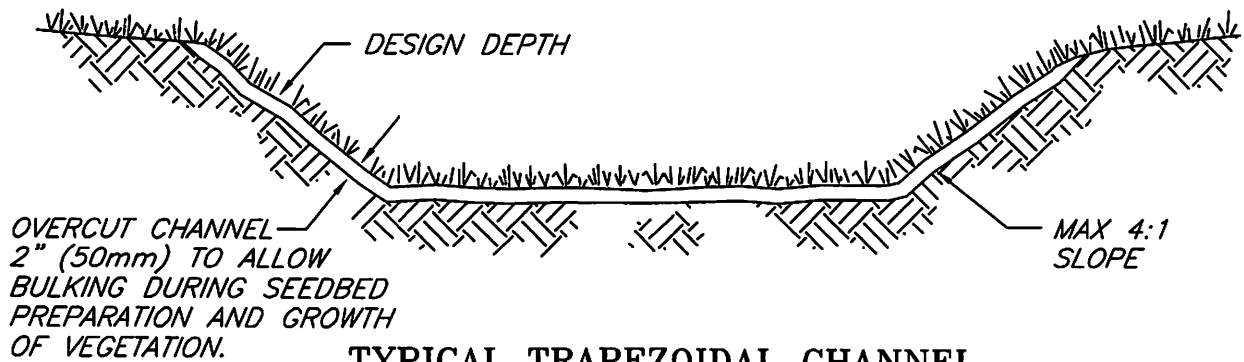

**TYPICAL TRAPEZOIDAL CHANNEL
CROSS-SECTION**


**GRASS-LINED CHANNEL
TYPICAL CROSS SECTIONS**

SILT FENCE



NOT TO SCALE


- NOTES:
1. SILT FENCE SHALL BE PLACED ON SLOPE CONTOURS TO MAXIMIZE PONDING EFFICIENCY.
 2. INSPECT AND REPAIR FENCE AFTER EACH STORM EVENT AND REMOVE SEDIMENT WHEN NECESSARY. 9" (225mm) MAXIMUM RECOMMENDED STORAGE HEIGHT.
 3. REMOVED SEDIMENT SHALL BE DEPOSITED TO AN AREA THAT WILL NOT CONTRIBUTE TO AN OFF-SITE AND CAN BE PERMANENTLY STABILIZED.

INSTALLATION WITHOUT TRENCHING

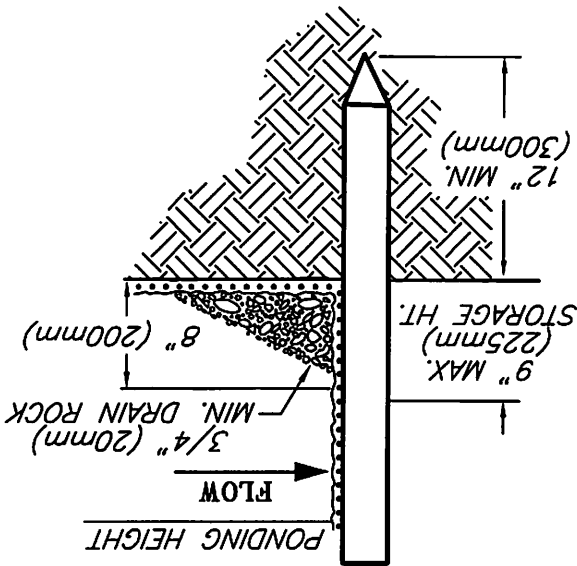


TRENCH DETAIL

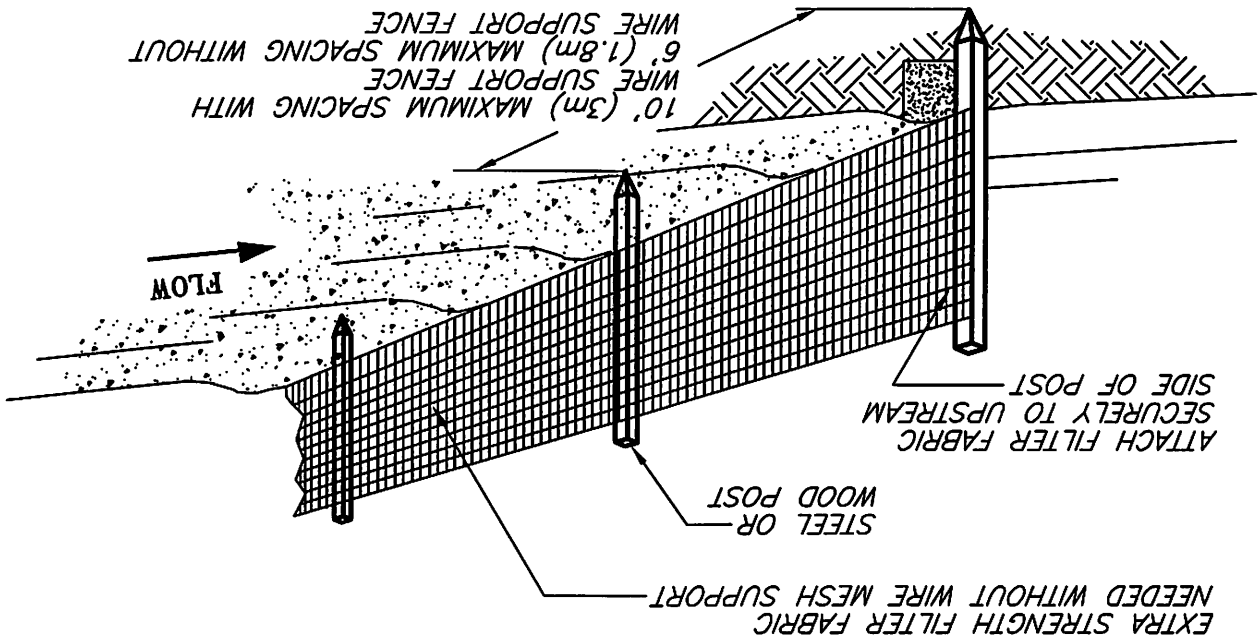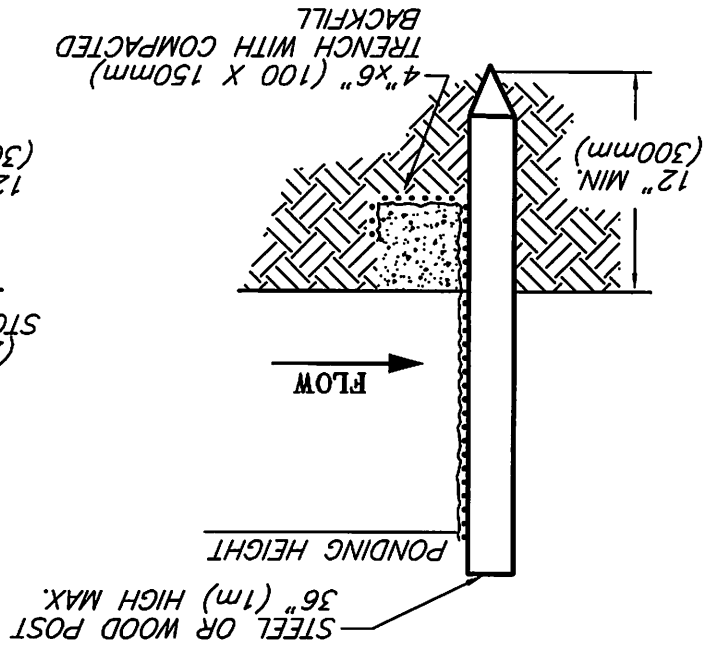

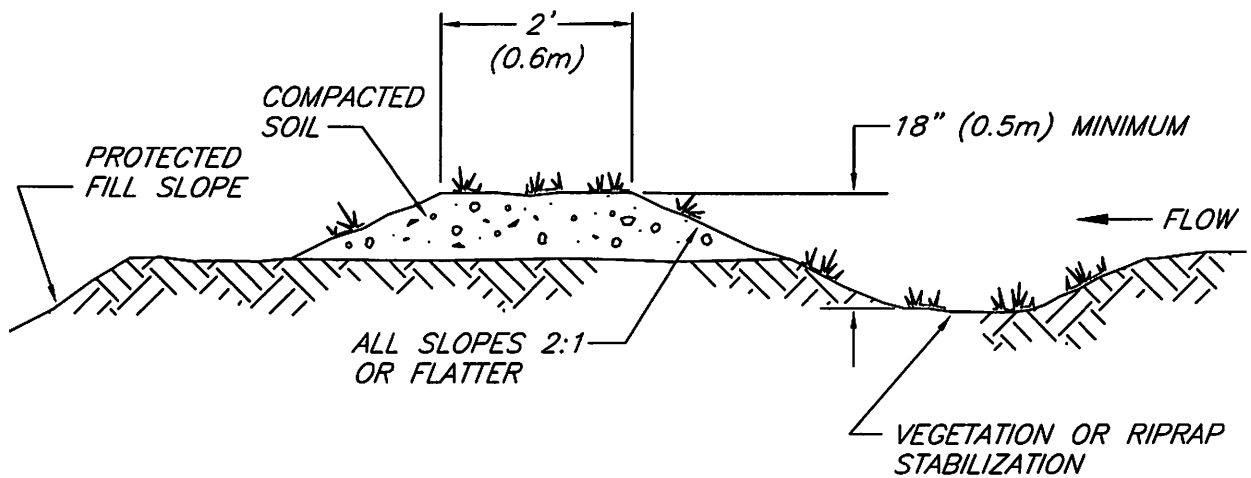

TYPICAL FILL DIVERSION

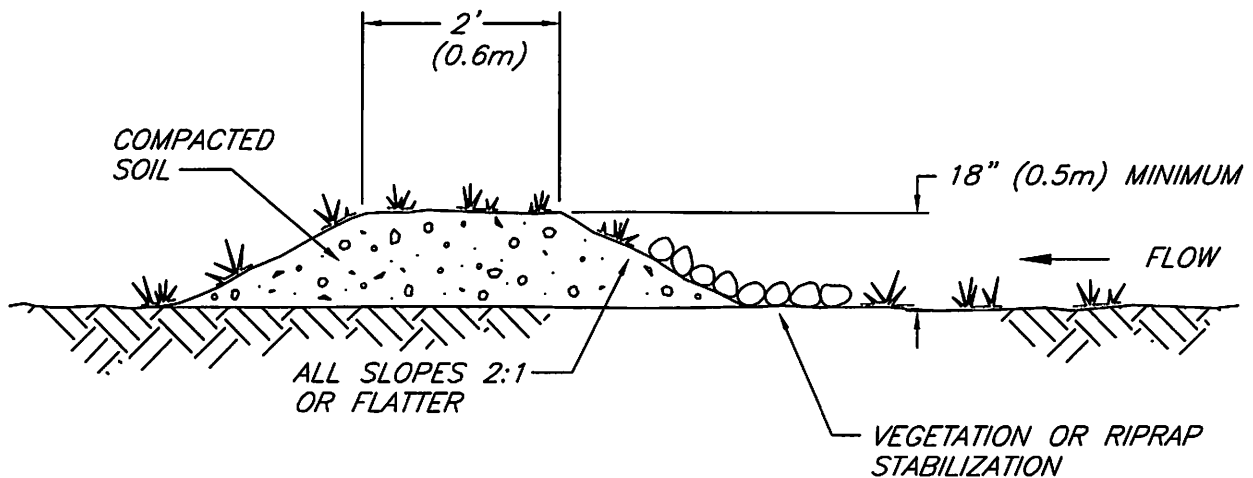

TYPICAL TEMPORARY DIVERSION DIKE

NOTES:

1. THE CHANNEL BEHIND THE DIKE SHALL HAVE POSITIVE GRADE TO A STABILIZED OUTLET.
2. THE DIKE SHALL BE ADEQUATELY COMPACTED TO PREVENT FAILURE.
3. THE DIKE SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT SEEDING OR RIPRAP.

**TEMPORARY
DIVERSION DIKE**

STRAW BALE CHECK DAM

NOT TO SCALE


- NOTES:
1. EMBED BALES 4" (100mm) INTO THE SOIL AND 'KEY' BALES INTO THE CHANNEL BANKS.
 2. POINT 'A' MUST BE HIGHER THAN POINT 'B'; (SPILLWAY HEIGHT)
 3. PLACE BALES PERPENDICULAR TO THE FLOW WITH ENDS TIGHTLY ABUTTING.
 4. SPILLWAY HEIGHT SHALL NOT EXCEED 24" (0.6m).
 5. INSPECT AFTER EACH SIGNIFICANT STORM, MAINTAIN AND REPAIR PROMPTLY.

FILE: STRCHKDM


© 1994 JOHN McCULLAH


SPACING BETWEEN CHECK DAMS

SECTION A - A

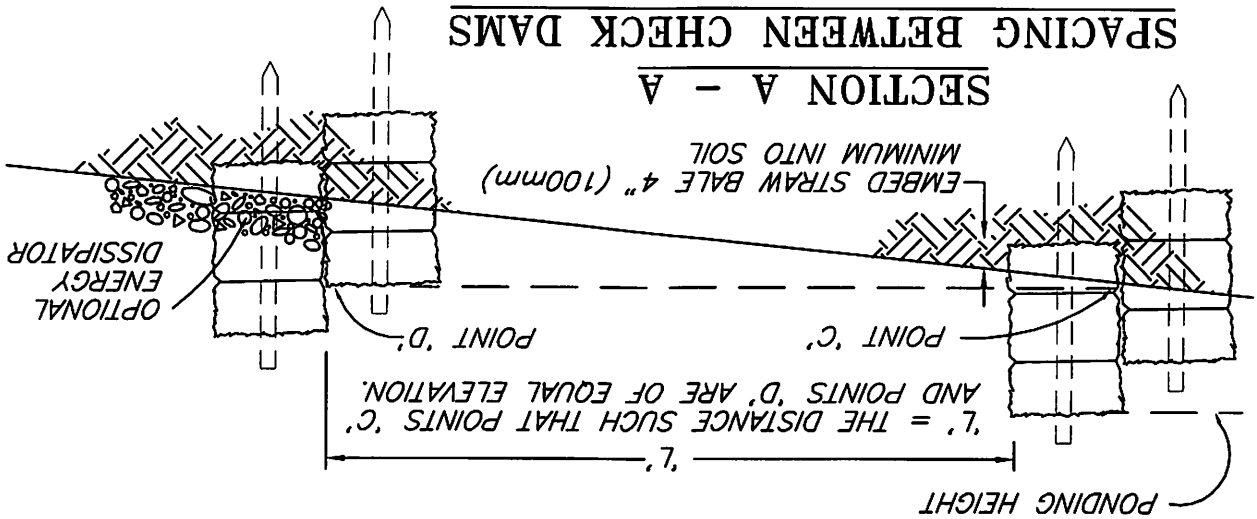


VIEW LOOKING UPSTREAM

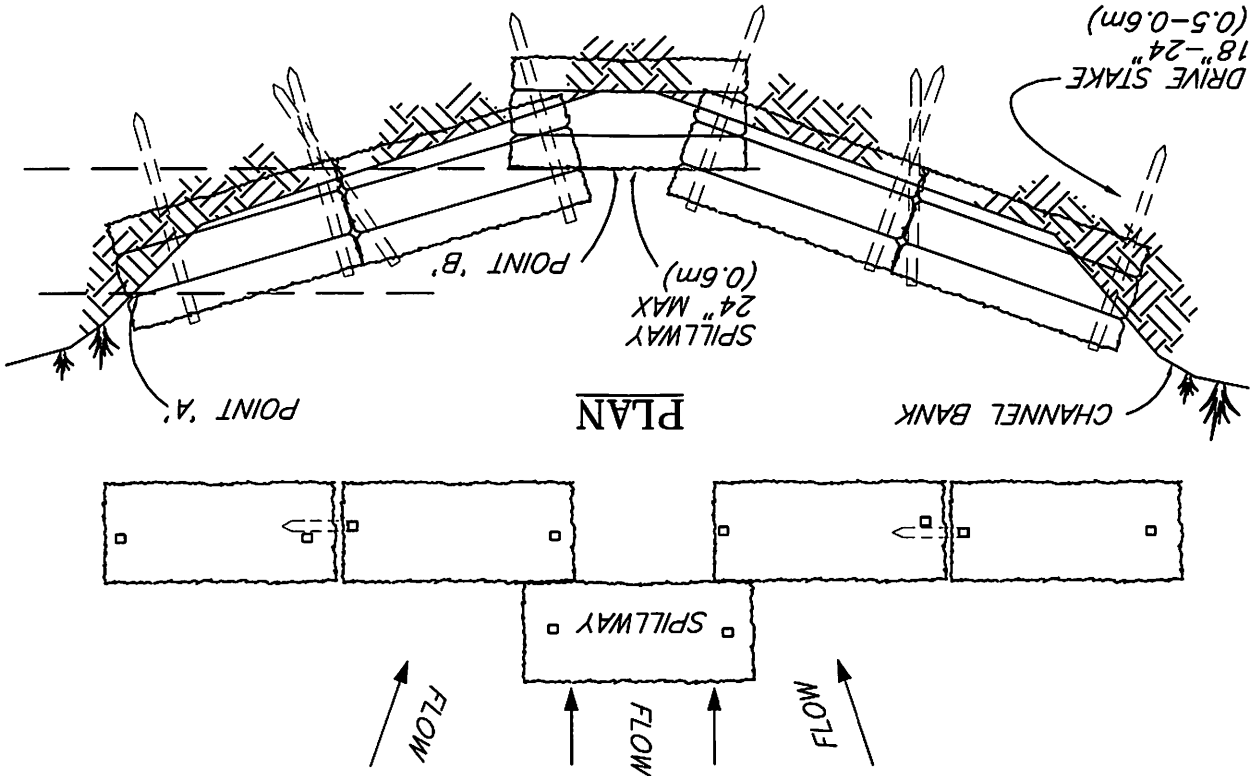

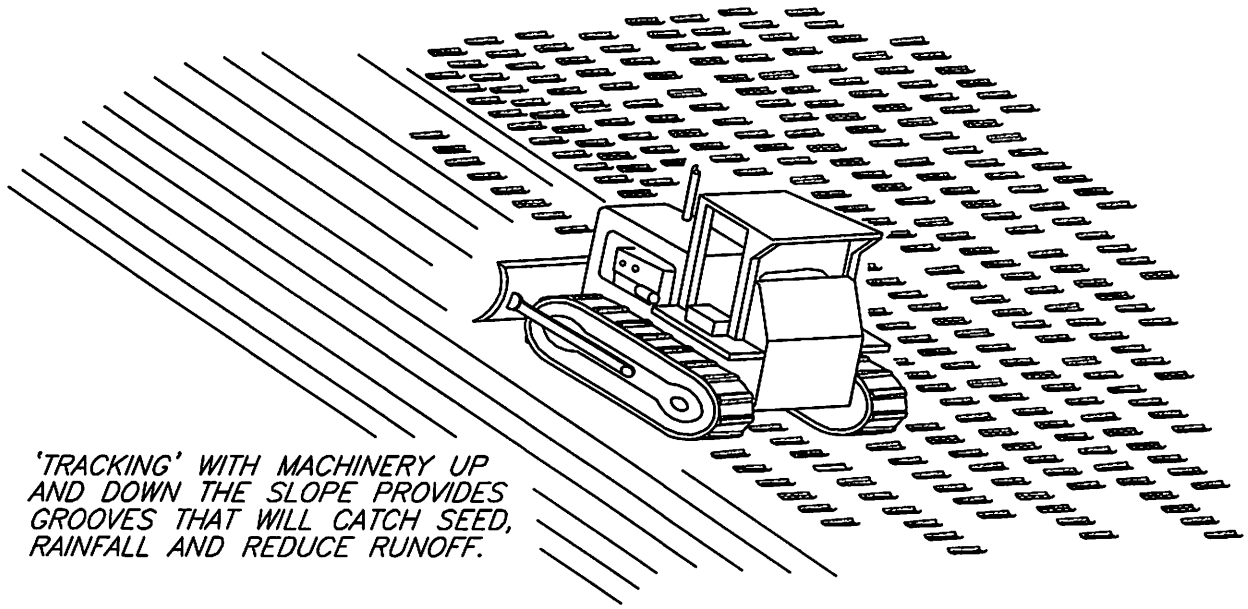

'TRACKING' WITH MACHINERY UP AND DOWN THE SLOPE PROVIDES GROOVES THAT WILL CATCH SEED, RAINFALL AND REDUCE RUNOFF.

TRACKING

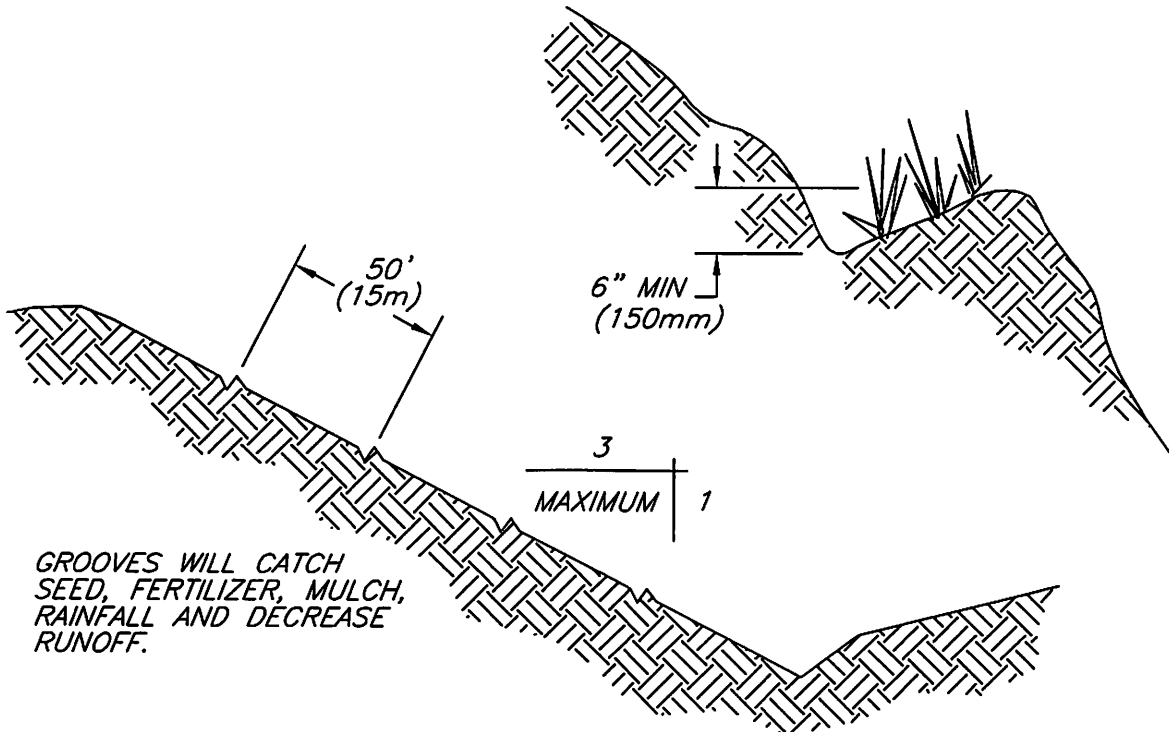

GROOVES WILL CATCH SEED, FERTILIZER, MULCH, RAINFALL AND DECREASE RUNOFF.

CONTOUR FURROWS

SURFACE
ROUGHENING

TEMPORARY BRUSH BARRIER

- NOTES:
1. BRUSH BARRIER TO BE USED WHERE NATURAL GROUND IS LEVEL OR SLOPING AWAY FROM PROJECT.
 2. PLACE BRUSH, LOG AND TREE LAPS APPROXIMATELY PARALLEL TO TOE OF FILL SLOPE WITH SOME OF THE HEAVIER MATERIALS BEING PLACED ON TOP TO PROPERLY SECURE THE BARRIER AS DETAILED AT LOCATIONS SHOWN ON PLANS OR AS DIRECTED BY THE ENGINEER.
 3. TO ALLOW WATER TO FLOW THROUGH BRUSH BARRIER, INTERMINGLE THE BRUSH, LOG AND TREE LAPS SO AS NOT TO FORM A SOLID DAM.

TEMPORARY BRUSH BARRIER

